



“my
Reference,”

CREATION 55

LOOSELAY / LOOSELAY ACOUSTIC

Gerflor[®]
theflooringgroup

PIONEER IN LOOSELAY FLOORING SOLUTIONS



2018
Carpet plank format

2016
Use of Econyl
yarn based on
recycled content

1989
Creation of Gradus
carpet tiles

**CREATION 55
LOOSELAY ACOUSTIC**
Launch of the new LVT
looselay 19dB acoustic solution

2020

2019

**CREATION 55/70
LOOSELAY**
Launch of the new looselay
LVT with unique Grip-Wave
backlayer

2013

**TACKY TILE &
SENSO EASY**
With integrated tackyfier

2009

SAGA²
First comfort tile
cork backing - 15dB acoustic

1991

SAGA
First comfort tile 50x50cm



Removable
installation



Mix & Match
Design & Formats




Fast
installation



Installation over
raised access floor

WHY GERFLOR CREATION LOOSELAY ?

A SOLUTION FOR ALL TRAFFIC

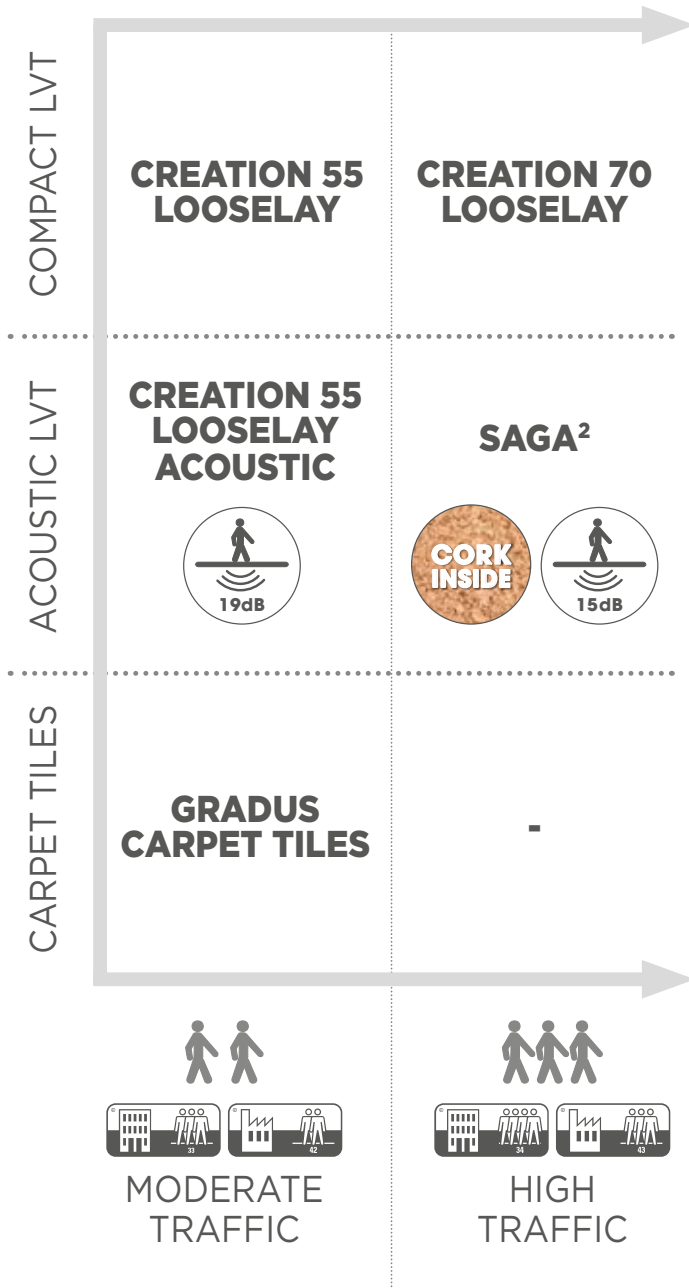

THE ECO-RESPONSIBLE LOOSELAY SOLUTIONS



COMPOSITION
100% REACH / Phthalate Free
(except recycled content)



INDOOR AIR QUALITY
TVOC below detection level
No Formaldehyde emission



RECYCLABILITY
100%




RECYCLED CONTENT
35%

CREATION 55

LOOSELAY

500 x 500 mm 229 x 1220 mm



PUR+ MATT

Easy maintenance

4D DESIGN

MATT SURFACE

Natural look

CRISTAL WEAR LAYER

High definition design & color

STRUCTURED EMBOSS

Ultra realistic surface

MIX&MATCH DESIGNS

Easy mix&match of designs & formats*

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE

Noise absorption

Soft underfoot

2 RIGID CORE

The best stability
Fiber glass inside

Renovation ceramic
4 mm joint

No adhesive up
to 30 m²*

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING

Super strong suction
to the subfloor

Air circulation:
better acoustic

Humidity circulation:
moisture resistance


Easily removable:
renovation

*Please refer to Gerflor's installation guidelines

CREATION 55

LOOSELAY ACOUSTIC

500 x 500 mm 229 x 1220 mm



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE




Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMBOSS



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of designs & formats*

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside



Renovation ceramic
4 mm joint

INSULATION ULTRA

ACOUSTIC BACKING



19 dB

CREATION 55 LOOSELAY A REMOVABLE INSTALLATION



2 OPTIONS



INSTALLATION WITH TACKYFIER



Application of the pressure sensitive adhesive




Installation




Smoothing

Free installation for Creation 55 Looselay (up to 30 sqm)



FIX & FREE INSTALLATION

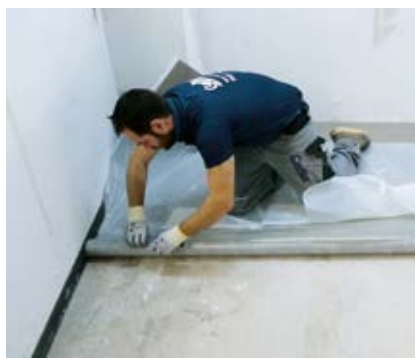

Unrolling of the Fix & Free 740



Laying



CREATION 55 LOOSELAY ACOUSTIC



2 IN 1 SOLUTION



THE BEST WALKING NOISE

> Comfort in the room



INSULATION ULTRA

- > The best impact sound reduction
- > No more noise annoyance from neighborhood



FOR TIME AND MONEY SAVINGS

THE SAME INSTALLATION METHOD THAN CREATION 55 LOOSELAY



Application of the pressure sensitive adhesive



Installation



Smoothing

CREATION 55 **LOOSELAY** CREATION 55 **LOOSELAY ACOUSTIC**



0060 Arena

229 mm x 1220 mm



0448 Malua Bay

229 mm x 1220 mm



0504 Twist

229 mm x 1220 mm



0441 Honey Oak

229 mm x 1220 mm



0456 Ranch

229 mm x 1220 mm



0347 Ballerina

229 mm x 1220 mm



0447 Amador

229 mm x 1220 mm



0796 Swiss Oak Golden

229 mm x 1220 mm



0846 Swiss Oak Pearl

229 mm x 1220 mm



0455 Longboard


229 mm x 1220 mm






0860 Norwegian Stone

500 mm x 500 mm

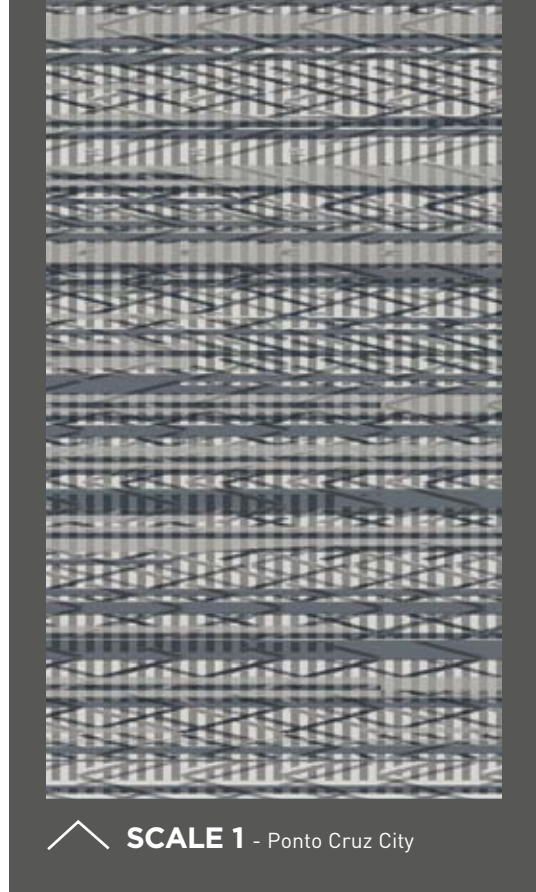


SCALE 1 - Ponto Cruz City

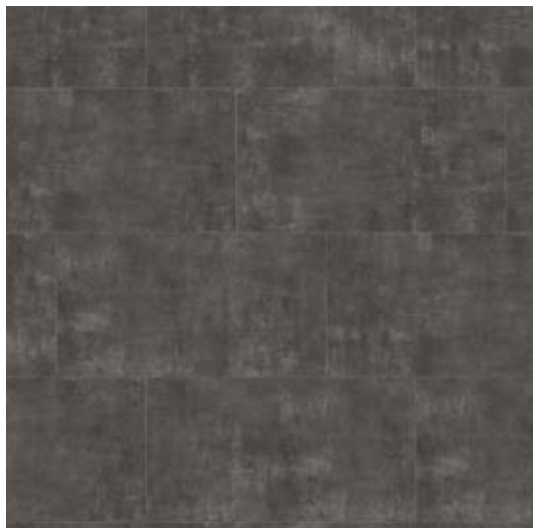

0374 Parker Station

500 mm x 500 mm

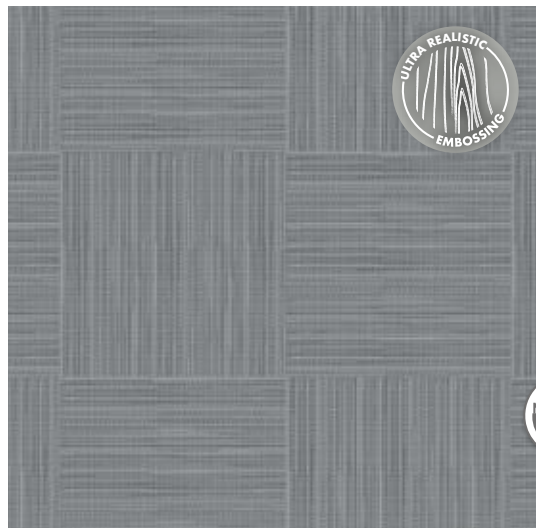


0878 Ponto Cruz City

500 mm x 500 mm



0618 Carmel

500 mm x 500 mm

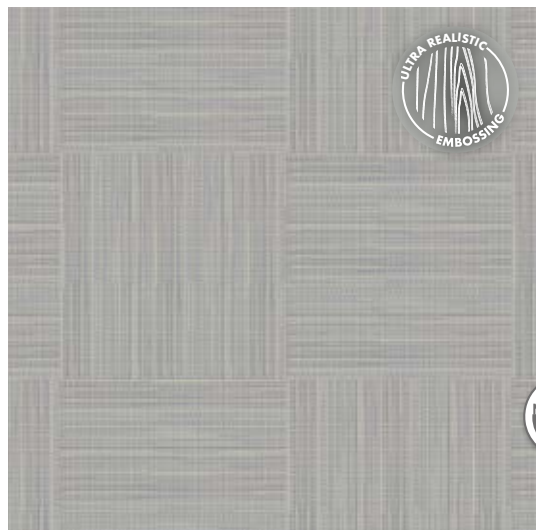


0876 Ponto Cruz Navy

500 mm x 500 mm




Additional views on interiordesigner.gerflor.com


EXPLORE THE WORLD OF POSSIBILITIES




SLIM STRIPES




FENCE




ACCORDEON

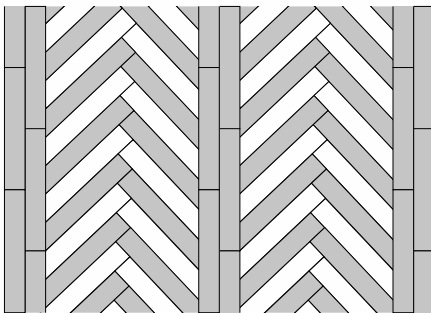


RYTHME

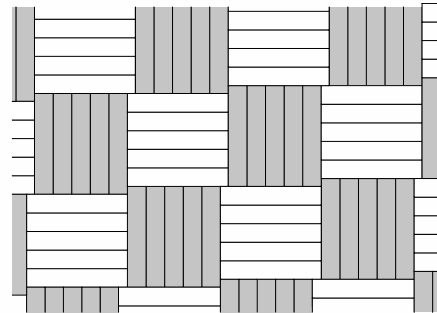


TRICOT



FAT STRIPES



PIANO




TARGET

SLIM STRIPES




THE PERFECT SOLUTION TO COMBINE WITH CARPET TILES




CREATION LOOSELAY
From 4.5 mm to 6 mm thickness

GRADUS CARPET
From 7 mm to 8.5 mm thickness

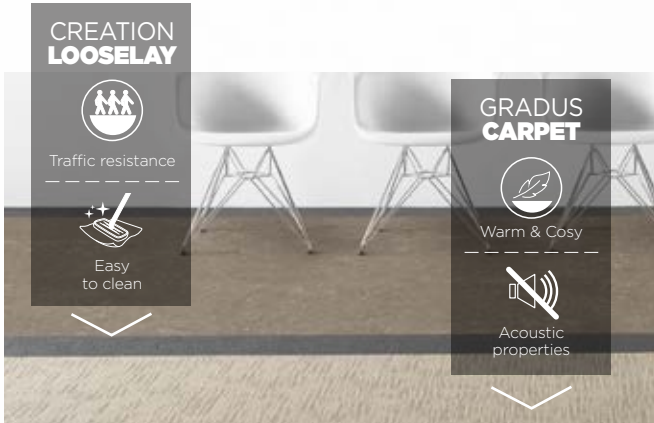


OPTION 1 - **EDGE TO EDGE**

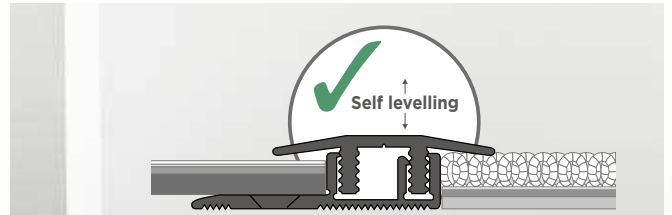

CREATION LOOSELAY
From 4 mm to 7 mm thickness

GRADUS CARPET
From 6 mm to 9 mm thickness

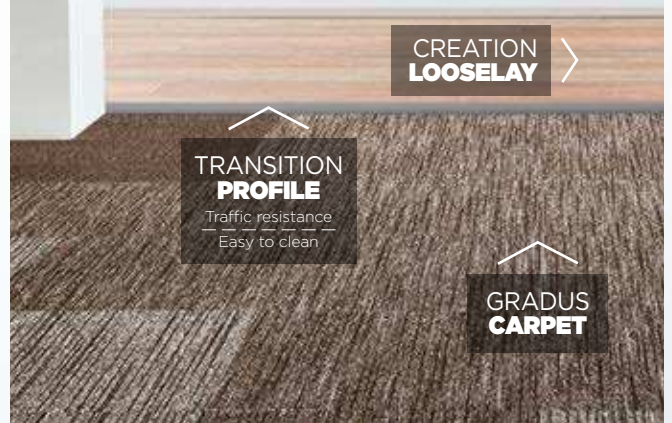


OPTION 2 - **TRANSITION PROFILE**





ACCORDEON

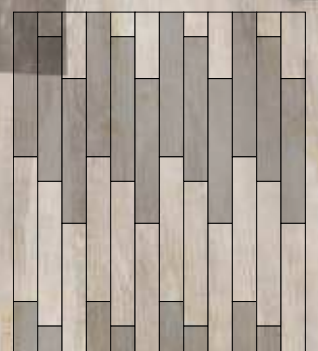



RYTHME





TARGET






CAPPUCCINÒ



PIANO

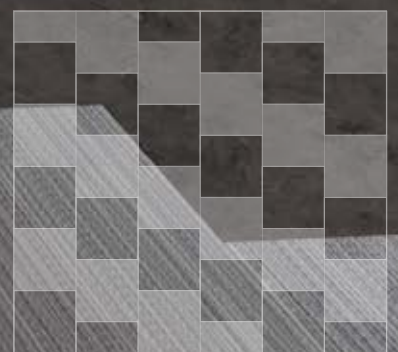



FAT STRIPES






TRICOT





A FULL SET OF FINISHES


COVERING SKIRTING



Ref. 2550*
(MDF)




TRANSITION PROFILE




SYMMETRIC DESIGN CLIP
Ref. 3351*

OTHER PROFILES




RAMP 5-6MM (aluminium)
Ref. 0505



LOOSELAY RAMP 5-6MM (aluminium)
Ref. 0609

DESIGN SKIRTINGS

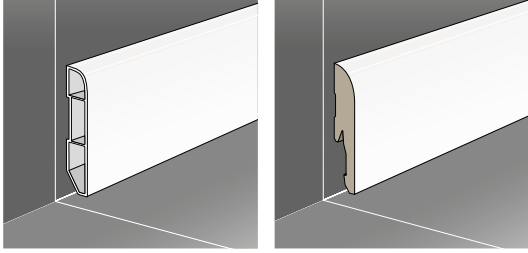

Ref. 6086 + Color code
(Vinyl) + Endcape Ref. 6087

Ref. 5947 + Color code
(MDF)

White to paint or matching design page 24

DESIGN SKIRTING

ENTRANCE MATS

↑
-- TRAFFIC LEVELS --



LOOSELAY ROMAT GT INSERT KIT
Ref. 1719




QUICK MAT TILE*
Ref. 1725+1726+1727

OTHER SOLUTIONS

STAIRNOSING SOLUTION

NOSING T67
(ALUMINIUM)
Ref. 0503



FLOOR PROTECTION

Ref. 058X

Gerflor
theflooringroup



DOUBLE-SIDED TAPE **FIX & FREE**

Ref. 058W 0001


















FOR MORE DETAILS

visit gerflor.com
LVT finishes
brochure



CROSS REFERENCES

CREATION 55 LOOSELAY / CREATION 55 LOOSELAY ACOUSTIC

SCANS	COLOR DESIGN	LOOSELAY INSTALLATION	CLIC INSTALLATION	GLUE DOWN INSTALLATION	DESIGN SKIRTINGS (matching designs)
	AMADOR - 0447	229x1220 mm	214x1239 mm	184x1219 mm	S004
	ARENA - 0060	229x1220 mm	214x1239 mm	184x1219 mm	S026
	BALLERINA - 0347	229x1220 mm	214x1239 mm	184x1219 mm 152x762 mm	S008
	CARMEL - 0618	500x500 mm	391x729 mm	457x914 mm	S020
	HONEY OAK - 0441	229x1220 mm	214x1239 mm	184x1219 mm	S033
	LONG BOARD - 0455	229x1220 mm	214x1239 mm	184x1219 mm	S034
	MALUA BAY - 0448	229x1220 mm	214x1239 mm	184x1219 mm	S035
	NORVEGIAN STONE - 0860	500x500 mm	391x729 mm	457x914 mm	S042
	PARKER STATION - 0374	500x500 mm	391x729 mm	610x610 mm	S047
	PONTO CRUZ CITY - 0878	500x500 mm	-	610x610 mm 152x762 mm	S052
	PONTO CRUZ NAVY - 0876	500x500 mm	-	610x610 mm 152x762 mm	S051
	RANCH - 0456	229x1220 mm	214x1239 mm 242x1461 mm	184x1219 mm 230x1500 mm	S053
	SWISS OAK GOLDEN - 0796	229x1220 mm	214x1239 mm 242x1461 mm	184x1219 mm 230x1500 mm	S015
	SWISS OAK PEARL - 0846	229x1220 mm	214x1239 mm 242x1461 mm	184x1219 mm 230x1500 mm	S014
	TWIST - 0504	229x1220 mm	214x1239 mm	184x1219 mm	S039

WHITE = S001

TECHNICAL DATA

CREATION 55 LOOSELAY / CREATION 55 LOOSELAY ACOUSTIC



* information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

**CREATION 55
LOOSELAY**

**CREATION 55
LOOSELAY ACOUSTIC**

DESCRIPTION

Total Thickness	EN ISO 24346	mm	4.50		5.50	
	ASTM F386-02	inch	0.18		0.20	
Thickness of the wearlayer	EN ISO 24340	mm	0.55		0.55	
	ASTM F410-02	inch	0.02		0.02	
Weight	EN ISO 23997	g/m ²	7500		7600	
Size / Format	ISO 24342	mm	229 x 1220	500 x 500	229x1220	500x500
	ASTM F 536	inch	9"x48"	19.7"x19.7"	9" x 48"	19.7" x 19.7"
Number of planks / tiles and sqm per box	-	-	8 / 2.23 m ²	8 / 2.0 m ²	8 / 2.23 m ²	8 / 2.0 m ²

CLASSIFICATION

Norm/Product Specification	-	-	EN ISO 10582	EN 651
	ASTM F 1700-04	-	Class III Type B	In progress
European Classification	EN ISO 10874	Class	33 - 42	33 - 42
Fire Rating	EN 13 501-1	Class	Bfl-s1	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2	< 2
Slip Resistance Wet ⁽¹⁾	DIN 51130 /BGR 181	Class	R10	R10

PERFORMANCES

Wear Resistance	EN 660.2	mm ³	≤ 2.0	< 2.0
Wear Group	-	group	T	T
Type Binder content	ISO 10582	group	I	-
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05	≤ 0.05
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	7	19
Room Impact	NF S 31074	dB	73	70
Castor chair test (Type W)	ISO 4918	-	OK	OK
Thermal Conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour Fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface Treatment	-	-	PUR+ Matt	PUR+ Matt
Chemical Products Resistance	EN ISO 26987	-	OK	OK

ENVIRONMENT/INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10
--------------------	-------------	-------------------	------	------

CE MARKING

CE	EN 14041	-		
----	----------	---	--	--

(1) Ramp test with oil

CREATION, NO FORMALDEHYDE, BETTER INDOOR AIR QUALITY

<p>COMPOSITION 100% REACH / Phthalate Free (except recycled content)</p>	<p>INDOOR AIR QUALITY TVOC below detection level No Formaldehyde emission</p>	<p>RECYCLABILITY 100%</p>	<p>RECYCLED CONTENT 35%</p>	<p>WELLNESS Walking noise: 73dB</p>
---	--	--------------------------------------	--	--

Visualize your reference



interiordesigner.gerflor.com

30 years experience
Since 1985

Manufacturer
3 LVT Factories

World Class Logistics
12 Logistics Hubs

Gerflor Design Centre
Exclusive Designs



“Serenity,,
Elodie - **End User**



“Time saving,,
Mika - **Installer**



“Unique Design,,
Pierre - **Architect**



“Confidence,,
Claire - **Store Manager**



“Reliability,,
Lucas - **Distributor**

That's why Gerflor is our **Reference**

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com
gerflor.com

Gerflor[®]
theflooringgroup