



LAYERS

LAYERS



		TRAFFIC
PLANKS & TILES	LVT DB	▶ Light to moderate
	LVT INTERLOCKING	▶ Light to moderate
		▶ High
ROLLS	CONTRACT VINYL ROLLS	▶ Light to moderate
		▶ High
	LINO	▶ Light to moderate
	SHOWER SYSTEM	▶ Light
SPORT	SPORT ROLLS (TARAFLEX®)	▶ Light to moderate
	SPORT TILES (POWERGAME)	▶ Light

			WIDEN APPLICATION SCOPE			
			IMPROVE ACOUSTIC	EASE INSTALLATION	DAMP FLOORS	ASBESTOS RENOVATION
			Smart Fix 16 dB	Smart Fix 16 dB	-	-
			Acoustic 15 dB Acoustic Plus (19 dB) Silence Plus 19 dB	-	-	-
			Acoustic 15 dB Acoustic Plus (19 dB)	-	-	-
			-	-	Isolsport	-
			-	-		Isolsport
			Korkment (15 dB)	-	-	-
			Tarafoam (17 dB)	-	-	-
			-	-	Isolsport	Isolsport
			-	Outdoor underlayer	-	-

2 SOLUTIONS TO PROTECT YOUR FLOOR ONCE INSTALLED

FLOOR PROTECTION



BATECO




GERFLOR SMART FIX 16 dB

FOR LVT
DRY BACK



DESCRIPTION

Underlayer with self-adhesive surface for a loose lay installation of LVT dry back and to achieve up to 16 dB acoustic insulation.

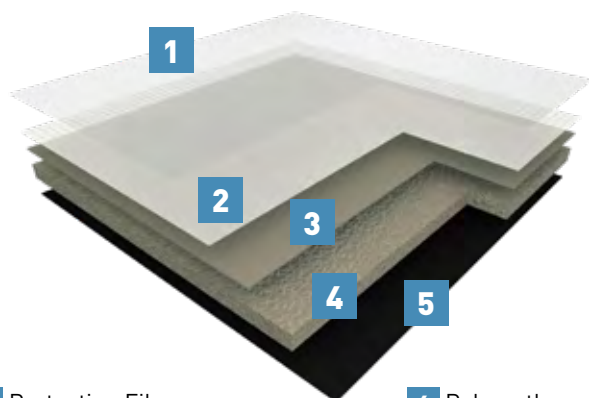

1 Protection Film

2 Self-adhesive PET foil

3 Fiber Glass Grid

4 Polyurethane

5 Fleece

THICKNESS	2 mm
WEIGHT	2000 g/m ²
FORMAT	roll
PACKAGING	1 x 7,5 ml = 7,5 m ²
CODE	1698
COMPATIBLE FLOORING*	Creation 30 / Creation 40 / Creation 55 / Virtuo 55 / Virtuo 30

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Unroll the underlayer with the protection film on the top. Release the protective film and apply the LVT 90° to underlayer.

[More information on gerflor.com](https://www.gerflor.com)

BENEFITS



UP TO 16 dB IMPACT SOUND INSULATION*

✓ Improves the acoustic comfort with Creation 30 and Creation 55



EASY TO INSTALL (No adhesive needed)

- ✓ More comfort for the installer
- ✓ No opening time
- ✓ No waiting time : the floors can be used immediately



EASY TO REMOVE (Loose lay installation)

- ✓ The subfloor remains clean
- ✓ No need to scratch the adhesive for the renovation

*measured according to EN ISO 717-2



IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION



PROTECTION




GERFLOR ACOUSTIC 15 dB

FOR LVT
CLIC & RIGID



DESCRIPTION

Isophonic underlayer to reduce impact noise up to 15 dB. Adapted to all types of traffic but semi-industrial and industrial.

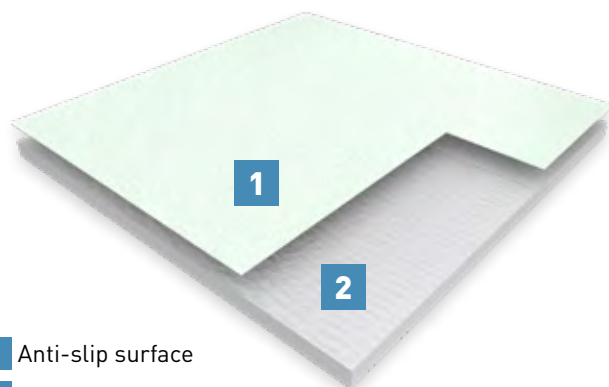

1 Anti-slip surface

2 Polyester scrim

THICKNESS	0,93 mm
WEIGHT	200g/m ²
FORMAT	rolls
PACKAGING	1 x 15 ml = 15 m ²
CODE	1798
COMPATIBLE FLOORING*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Creation 70 clic / Virtuo 30 Clic / Virtuo 55 Clic / Rigid 30 Lock

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Underlayer reverse rolled. Unroll the underlayer with anti-slip surface on top side. To be used with Gerflor Alu Tape (code: 5950) to connect two rolls.

[More information on gerflor.com](https://www.gerflor.com)

BENEFITS



15 dB IMPACT SOUND INSULATION*

✓ Improves the acoustic comfort



ADAPTED TO ALL TRAFFIC TYPES

✓ Fits to the floor traffic resistance



EASY TO HANDLE AND TO INSTALL


✓ 15 sqm packaged in a light (3 kg) roll

✓ Easy to install: lay, cut & tape



✓ From 58% and up to 72% recycled content

*15 dB measured according to EN ISO 717-2 with Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic and Rigid 30 Lock 16 dB measured with Creation 70 Clic.

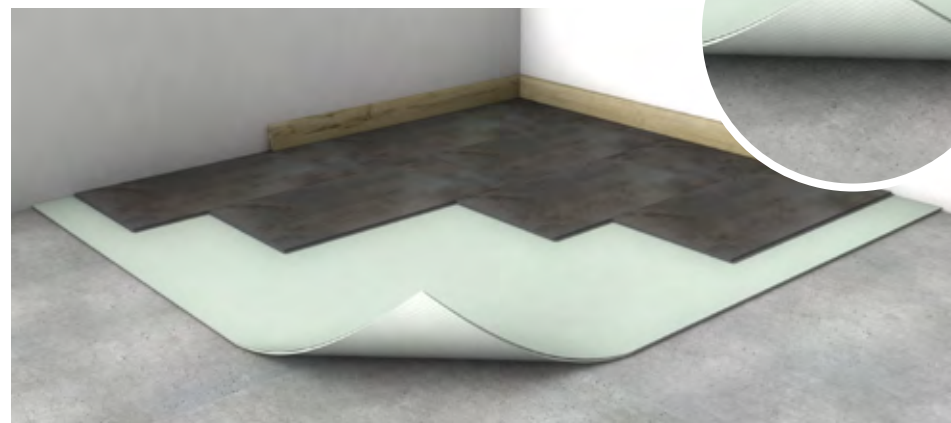

IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION




PROTECTION





DESCRIPTION

Isophonic underlayer to reduce impact noise up to 19 dB. Adapted to all types of traffic but semi-industrial and industrial.

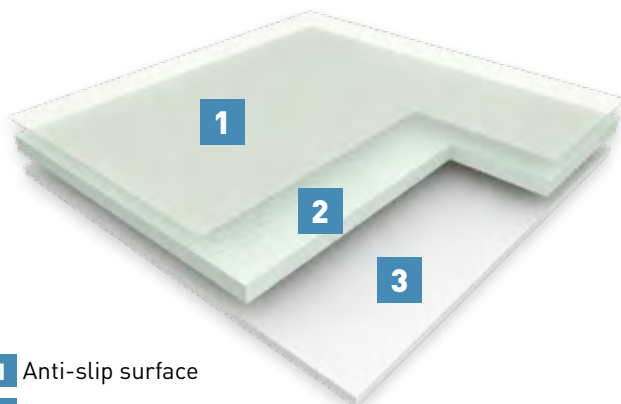

- 1** Anti-slip surface
- 2** Polyester scrim
- 3** PET acoustic fleece

THICKNESS	1,2 mm
WEIGHT	300g/m ²
FORMAT	rolls
PACKAGING	0,98 x 15,3 ml = 15 m ²
CODE	0704
COMPATIBLE FLOORING*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Creation 70 clic / Virtuo 30 Clic / Virtuo 55 Clic

Compliant with container shipment





*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*


Unroll the underlayer with anti-slip surface on top side. To be used with Gerflor Alu Tape (code: 5950) to connect two rolls.

[More information on gerflor.com](http://www.gerflor.com)

BENEFITS

-  **19 DB IMPACT SOUND INSULATION***
✓ Improves significantly the acoustic comfort
-  **ADAPTED TO ALL TRAFFIC TYPES**
✓ Fits to the floor traffic resistance
-  **EASY TO HANDLE AND TO INSTALL**
✓ 15 sqm packaged in a light (4,25 kg) roll
✓ Easy to install: lay, cut & tape
-  ✓ From 36% and up to 42% recycled content

*measured according to EN ISO 717-2 with Creation 70 CLic, Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic.

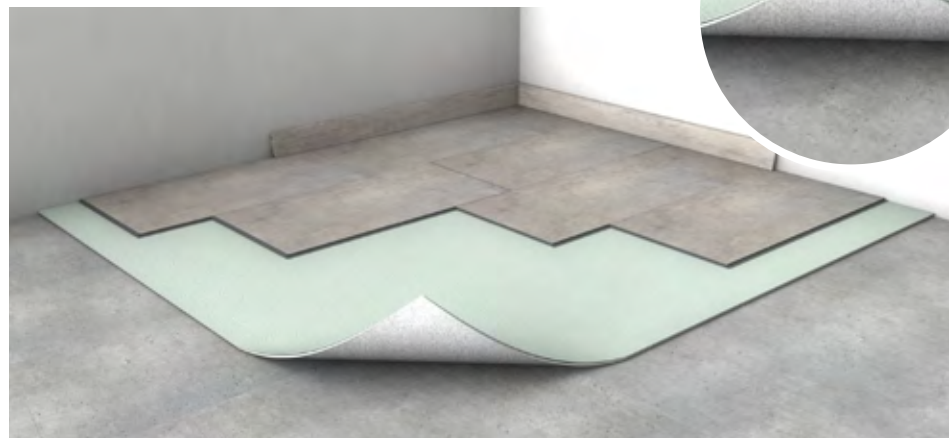

IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION



PROTECTION




GERFLOR SILENCE PLUS 19 dB

FOR LVT
CLIC & RIGID



DESCRIPTION

Underlayer in accordion to achieve up to 19 dB acoustic sound insulation with Gerflor LVT Clic. Adapted to moderate traffic.

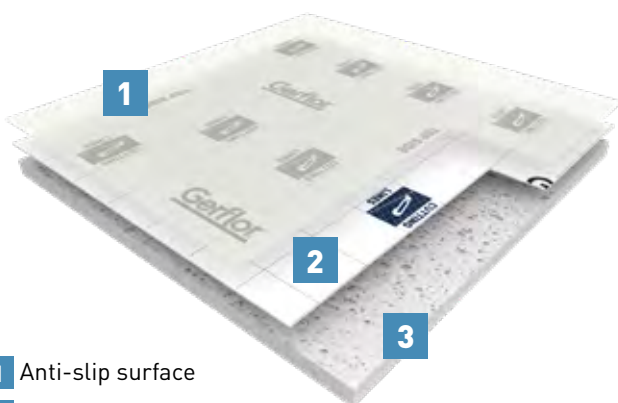

- 1 Anti-slip surface
- 2 PET Film
- 3 XPS Foam

THICKNESS	1,5 mm
WEIGHT	300g/m ²
FORMAT	accordion
PACKAGING	1,18 x 8,5 ml = 10 m ²
CODE	5949
COMPATIBLE FLOORING*	Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic / Virtuo 30 Clic / Virtuo 55 Clic / Rigid 30 Lock

Not compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Unfold the underlayer and place the white side on the subfloor. To be used with Gerflor Alu Tape (code: 5950) to connect two bands.

[More information on gerflor.com](http://www.gerflor.com)

BENEFITS

- 19 dB IMPACT SOUND INSULATION***
 ✓ Improves significantly the acoustic comfort
- ADAPTED TO MODERATE TRAFFIC**
 ✓ Perfectly suitable for residential as well as for semi-contract uses
- EASY TO HANDLE AND TO INSTALL**
 ✓ 10 sqm packaged in an handlable and light (3,5 kg) box
 ✓ Easy to install: lay, cut & tape
- 100% recyclable**

*measured according to EN ISO 717-2 with Creation 30 Solid Clic / Creation 40 Solid Clic / Creation 55 Solid Clic, Virtuo 55 Clic, Virtuo 30 Clic.



IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION




PROTECTION



DESCRIPTION

Isophonic underlayer to reduce impact noise up to 17** dB in Gerflor shower system.

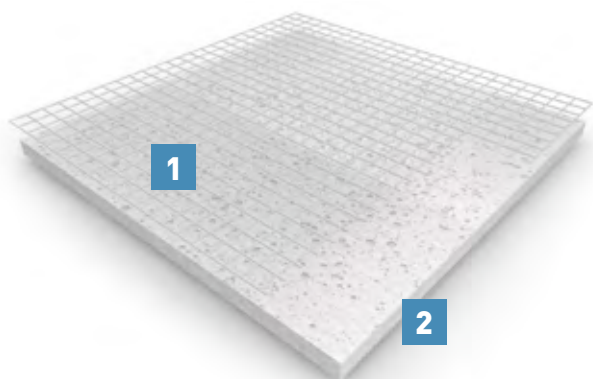

- 1** Glass fiber grid
- 2** PVC THD foam

THICKNESS	2 mm
WEIGHT	940g/m ²
FORMAT	roll
PACKAGING	2 m roll x 20 lm = 40 m ²
CODE	997C
COMPATIBLE FLOORING*	Tarasafe in shower

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction.

INSTALLATION*

Unroll the underlayer, fibre grid on the top. Levels out around the edge of the room. Acrylic bonding of both Tarafaam and roll on it.

[More information on gerflor.com](https://www.gerflor.com) 

BENEFITS



17** dB IMPACT SOUND INSULATION IN THE SHOWER SYSTEM

- ✓ Brings acoustic comfort when the shower is upstairs



STOCKING FLEXIBILITY

- ✓ No need to stock a comfort version of the roll, the underlayer can be used with any colour of the Tarasafe shower system floor range



- ✓ 100% recyclable with the PVC floors

**17 dB with Tarasafe Ultra H₂O, 16 dB with Tarasafe Standard, Tarasafe Ultra, Tarasafe Design & Tarasafe Geo.



IMPROVE ACOUSTIC



EASE INSTALLATION



DAMP FLOORS



ASBESTOS RENOVATION



PROTECTION

DESCRIPTION

Isophonic underlayer to reduce impact noise up to 15 dB with Gerlor DLW linoleum.



1 72% natural materials (linseed oil, resin, cork, jute)

THICKNESS	2 mm
WEIGHT	1450g/m ²
FORMAT	roll
PACKAGING	2 m roll x 20-311m = 40-62 m ²
CODE	R1020102
COMPATIBLE FLOORING*	2 mm and 2,5 mm DLW Linoleum compact (except Lino Art Star and Lino Art Metallic)

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Installation of the Korkment can be in same direction as the DLW Linoleum (with an offset of minimum 50 cm between seams of Korkment and DLW Linoleum) or transverse.

BENEFITS




15 dB ACOUSTIC INSULATION

✓ Improves the acoustic comfort



NATURAL ACOUSTIC SOLUTION

✓ 72% made of natural materials

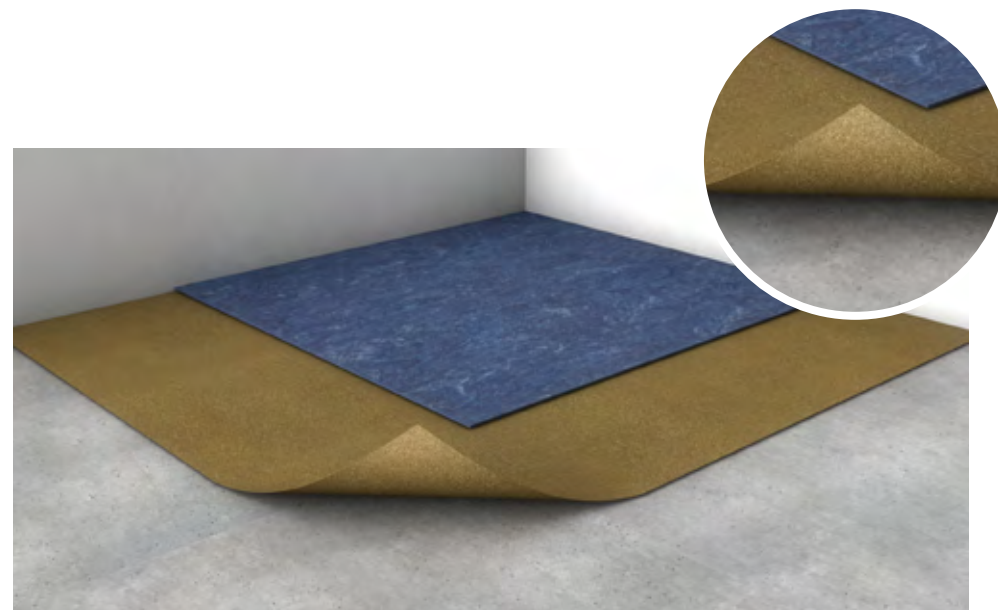

IMPROVE ACOUSTIC



EASE INSTALLATION



DAMP FLOORS



ASBESTOS RENOVATION




PROTECTION

GERFLOR SMART FIX 16 dB

FOR LVT
DRY BACK 

DESCRIPTION

Underlayer with self-adhesive surface for a loose lay installation of LVT dry back and to achieve up to 16 dB acoustic insulation.

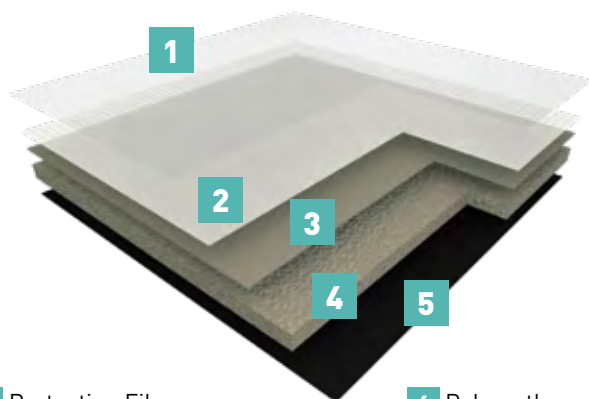

1 Protection Film

2 Self-adhesive PET foil

3 Fiber Glass Grid

4 Polyurethane

5 Fleece

THICKNESS	2 mm
WEIGHT	2000g/m ²
FORMAT	roll
PACKAGING	1 x 7,5 ml = 7,5 m ²
CODE	1698
COMPATIBLE FLOORING*	Creation 30 / Creation 40 / Creation 55 / Virtuo 55 / Virtuo 30

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Unroll the underlayer with the protection film on the top. Release the protective film and apply the LVT 90° from underlayer.

[More information on gerflor.com](https://www.gerflor.com) 

BENEFITS



EASY TO INSTALL (No adhesive needed)

- ✓ More comfort for the installer
- ✓ No opening time
- ✓ No waiting time: the floors can be used immediately



EASY TO REMOVE (Loose lay installation)

- ✓ The subfloor remains clean
- ✓ No need to scratch the adhesive for the renovation



UP TO 16 dB IMPACT SOUND INSULATION

- ✓ Improves the acoustic comfort with Creation 30, Creation 40 and Creation 55

*measured according to EN ISO 717-2



IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION



PROTECTION




OUTDOOR UNDERLAYER

FOR POWERGAME
TILES 

DESCRIPTION

Underlayer to prevent the unclipping of outdoor tiles in specific conditions (hot weather, non flat subfloor). Must be used outdoor, for temporary use only (events).

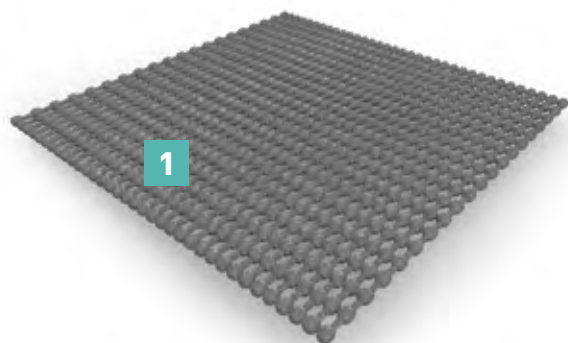

1 PVC coated polyester with a foam texture

THICKNESS	2,95 mm
WEIGHT	0,57 kg/sqm
FORMAT	roll
PACKAGING	2m roll x 20 lm = 40 m ²
CODE	S249
COMPATIBLE FLOORING*	PowerGame+




Compliant with container shipment


*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Unroll the underlayer. Edge to edge installation. Before laying the outdoor tiles. Only for temporary use.

BENEFITS

-  **WIDEN THE APPLICATION SCOPE OF POWERGAME+**
✓ Prevents unclipping of PowerGame+ tiles, in case of hot temperatures and non-flat subfloors.
-  **EASY TO INSTALL AND UNINSTALL**
✓ Looselay installation
-  **ECONOMICAL**
✓ Can be used several times (estimated life time: 12 events)

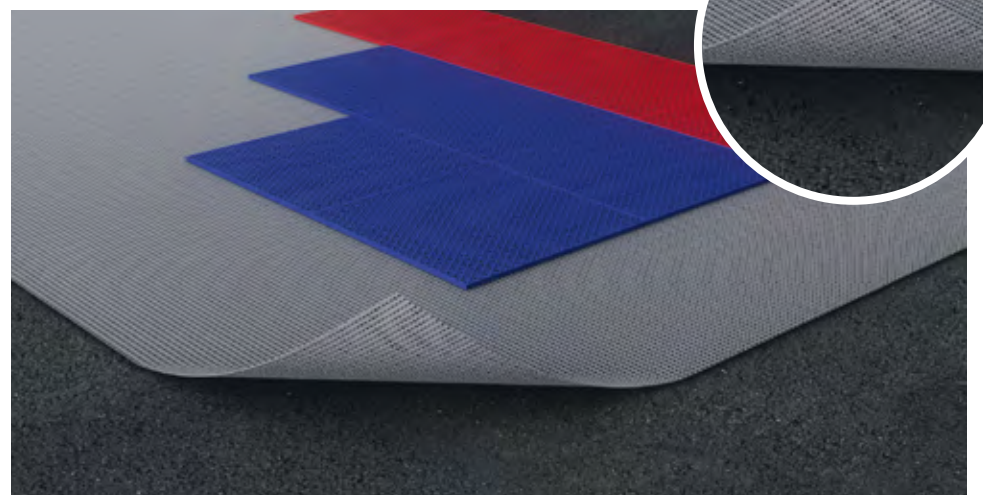

IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION



PROTECTION





DESCRIPTION

Designed to enable loose laying on sensitive subfloors (risks of humidity, asbestos...).



1 100% PVC

THICKNESS	1,7 mm
WEIGHT	1345 g/m ²
FORMAT	roll
PACKAGING	2 m roll x 45 lm = 90 m ²
CODE	0827/0828/0829/0830
COMPATIBLE FLOORING*	Taraflex® sport floor / Taralay / Transit / Tradiflor / Taradal / Transidal / Saga ² floor

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Keep the raised surface, floor side, on the periphery.
Bond vinyl floors with an acrylic adhesive (for instance Gertec from Gerflor)
For installation on concrete subfloors.

[More information on gerflor.com](https://www.gerflor.com)

BENEFITS



INSTALLATION ON DAMP SURFACES (<7% HUMIDITY (CCM))

✓ The raised effect allows humidity to circulate



INSTALLATION ON SENSITIVE SURFACES (ASBESTOS)

✓ The loose lay installation enables to recover asbestos floor without damage



✓ 100% recyclable with the PVC floors



IMPROVE ACOUSTIC



EASE INSTALLATION



DAMP FLOORS



ASBESTOS RENOVATION



PROTECTION



DESCRIPTION

Designed to enable loose laying on sensitive subfloors (risks of humidity, asbestos...).



1 100% PVC

THICKNESS	1,7 mm
WEIGHT	1345 g/m ²
FORMAT	roll
PACKAGING	2 m roll x 45 lm = 90 m ²
CODE	0827/0828/0829/0830
COMPATIBLE FLOORING*	Taraflex® sport floor / Taralay / Transit / Tradiflor / Taradal / Transidal / Saga ²

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Keep the raised surface, floor side, on the periphery.
Bond vinyl floors with an acrylic adhesive (for instance Gertec from Gerflor)
For installation on concrete subfloors.

[More information on gerflor.com](https://www.gerflor.com)

BENEFITS



INSTALLATION ON SENSITIVE SURFACES (ASBESTOS)

✓ The loose lay installation enables to recover asbestos floor without damage



INSTALLATION ON DAMP SURFACES (<7% HUMIDITY (CCM))

✓ The raised effect allows humidity to circulate



✓ 100% recyclable with the PVC floors



IMPROVE
ACOUSTIC



EASE
INSTALLATION



DAMP
FLOORS



ASBESTOS
RENOVATION




PROTECTION



DESCRIPTION

Designed to protect sports floors by non sporting use of the flooring. It prevents marking by chairs, tables, heels on the sport floor.

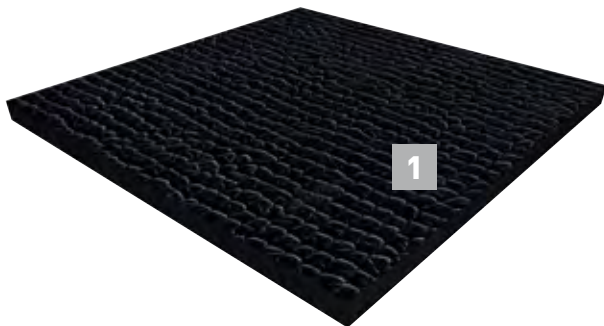

1 100% recycled PVC

THICKNESS	1,5 mm
WEIGHT	2250 g/m ²
FORMAT	roll
PACKAGING	1,5 m roll x 20/30 lm = 30/45 m ²
CODE	HM12/HM06
COMPATIBLE FLOORING*	All

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Edge to edge installation.

Strips can be secured with single-sided adhesive tape, for example AT7 from Gerflor. Specific equipments exist to transport, store, roll/unroll Bateco.

More information on gerflor.com

BENEFITS



EFFICIENT PROTECTION OF THE SPORT FLOORING DURING NON SPORTIVE EVENT

- ✓ 1,5 mm homogeneous surface
- ✓ Good resistance to abrasion and indentation




SPECIFIC RANGE OF EQUIPMENT AVAILABLE

- ✓ Easy to install and roll
- ✓ Easy to store



ENVIRONMENTAL FRIENDLY

- ✓ Made of 100% recycled PVC
- ✓ Reusable
- ✓ 100% recyclable with the PVC floors

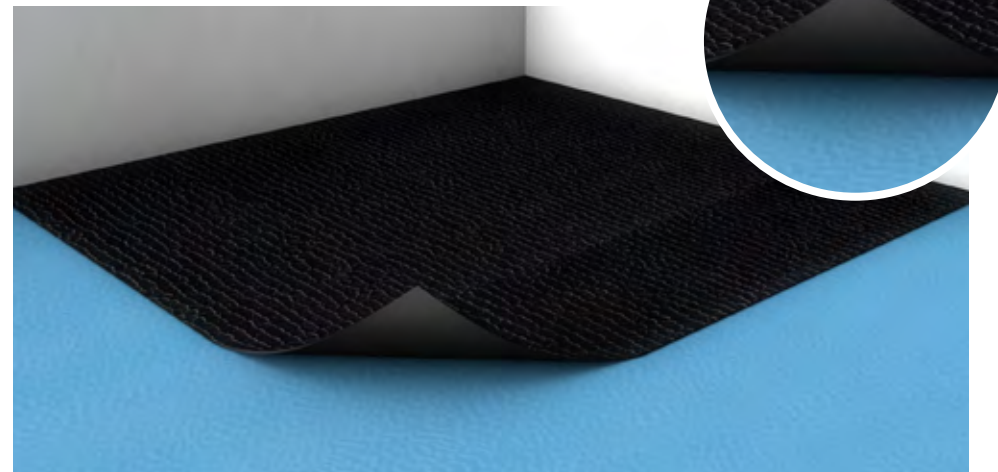



DESCRIPTION

Floor protection to preserve the floors laid down against scratches and stains until the site is delivered.



- 1 Wear layer: waterproof polyethylene film
- 2 Backing: non-woven PET, resined with an acrylic binder

THICKNESS	2,5 mm
WEIGHT	120 g/m ²
FORMAT	roll
PACKAGING	1 m x 50 lm = 50 m ²
CODE	058X
COMPATIBLE FLOORING*	All

Compliant with container shipment

*Please refer to installation guidelines for updated list and possible restriction

INSTALLATION*

Clean the surface to be covered from dust to ensure better adhesion. Apply the product in 10 cm (4") overlapping strips.

More information on gerflor.com

BENEFITS



EFFECTIVE PROTECTION

✓ Against scratches, stains and other external stresses thanks to its a waterproof, scratch-resistant wear layer



SLIGHTLY STICKY

✓ Backing ensures a good hold on the floor for a safe use and allows to remove it and to reposition it very easily



REUSABLE

