





Wide product range: engineered plank parquet, solid and engineered floor-boards, chevron parquet.

A wide range of colors, decors and types of treatment – more than 50.

Popular sizes, suitable for both large and small spaces.

High quality finishing: UV-varnish, UV-oil or natural oil.


Operational stability.

The durability and maintainability.





## COLOUR



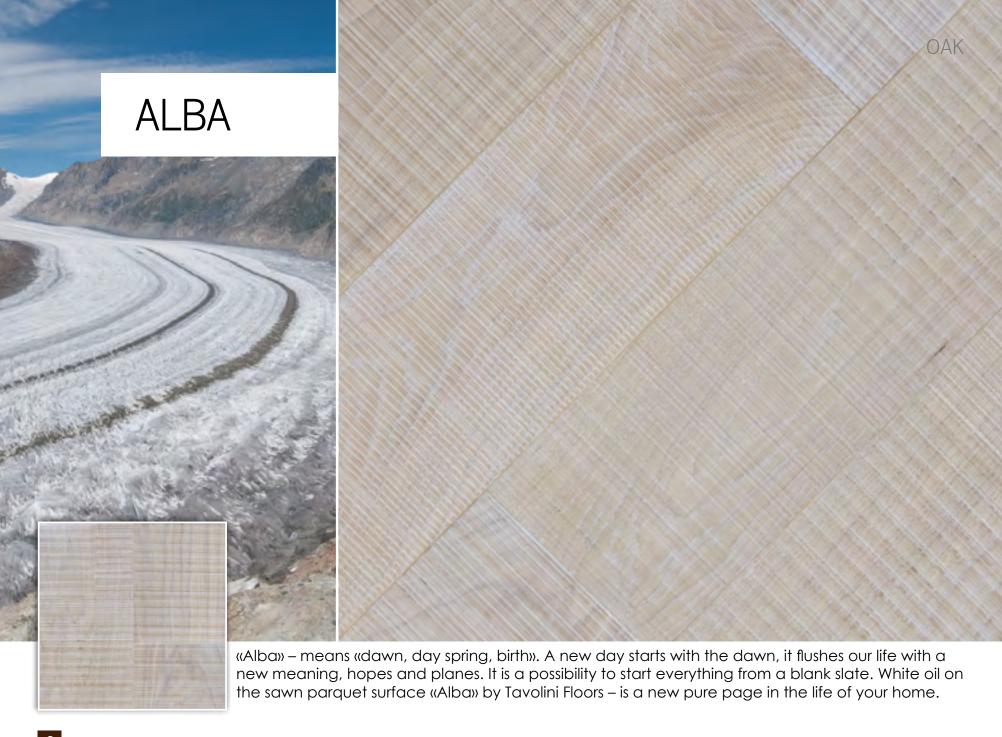



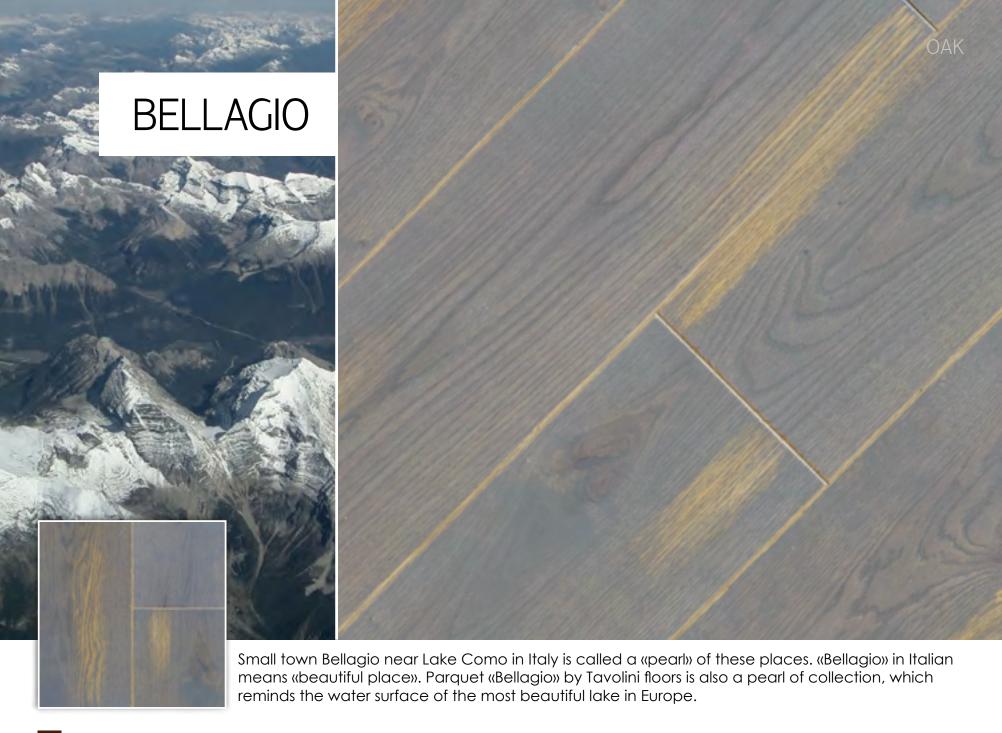

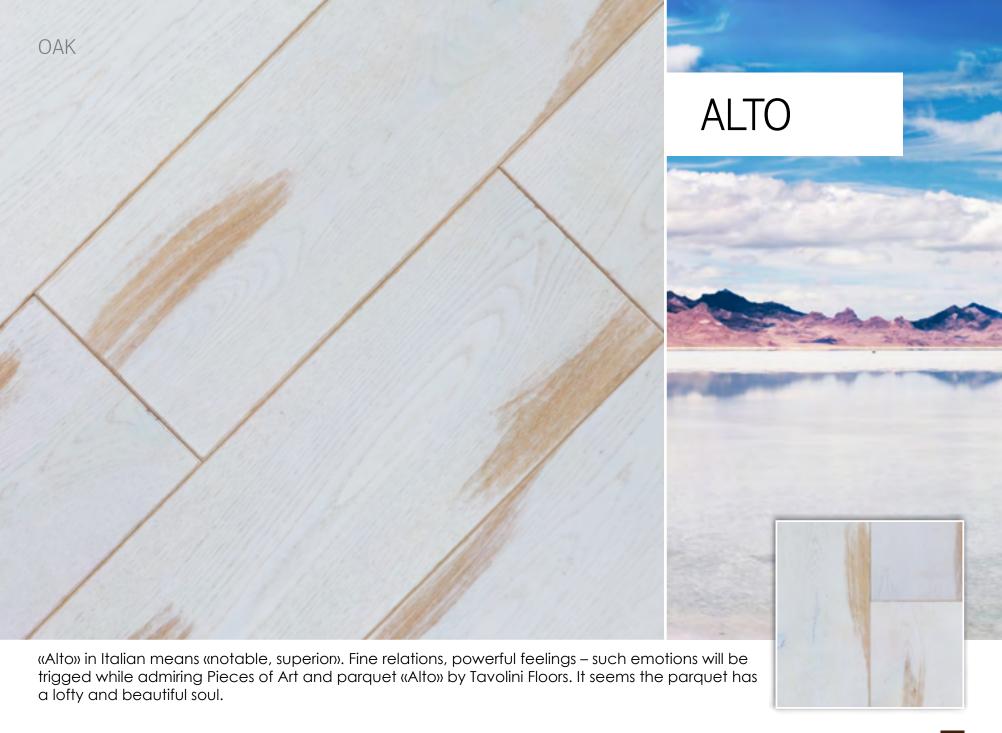














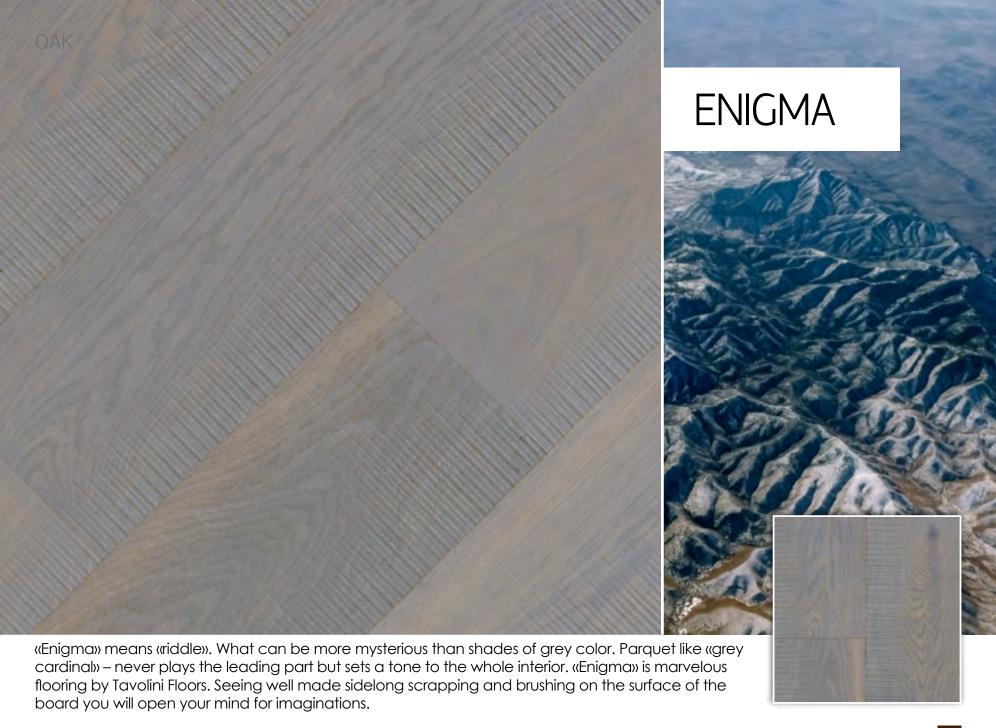







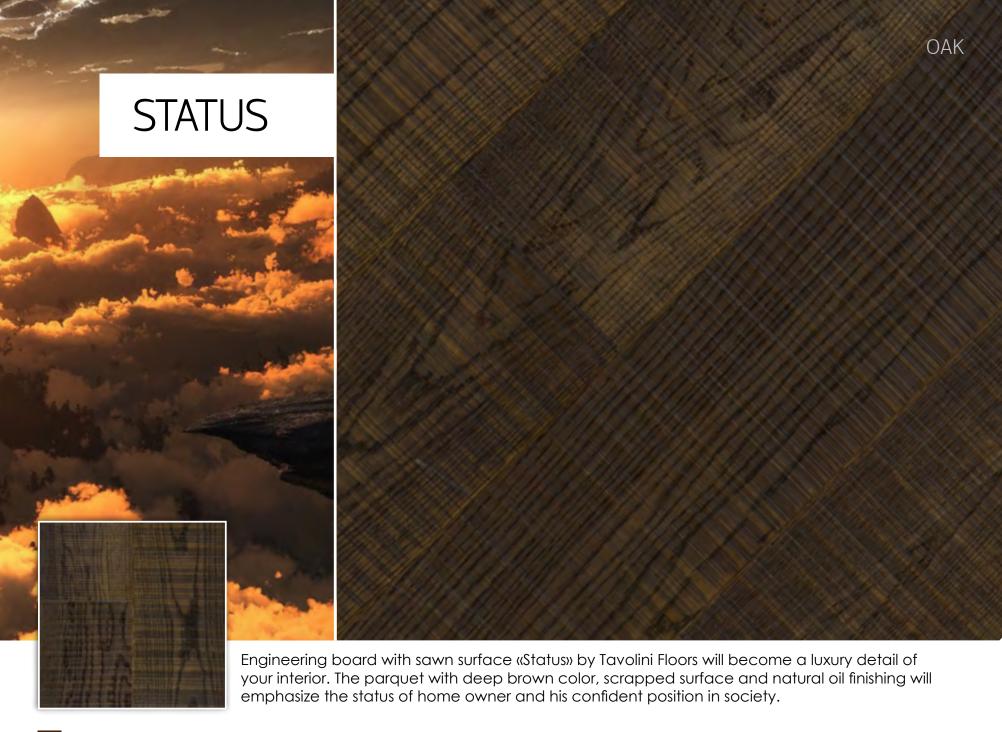


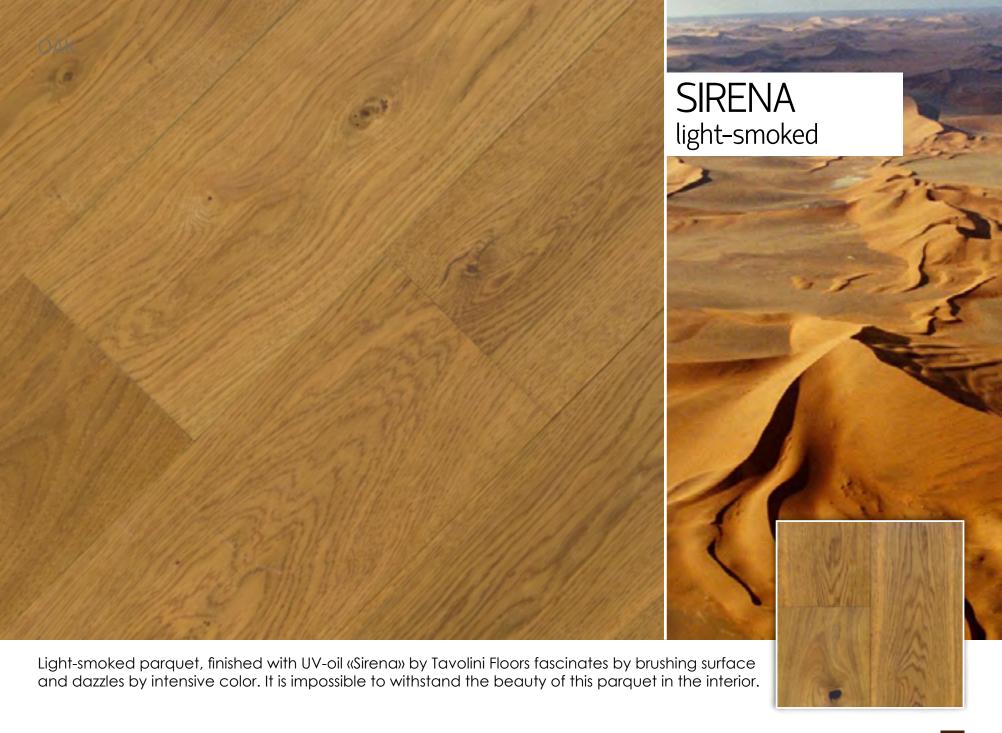


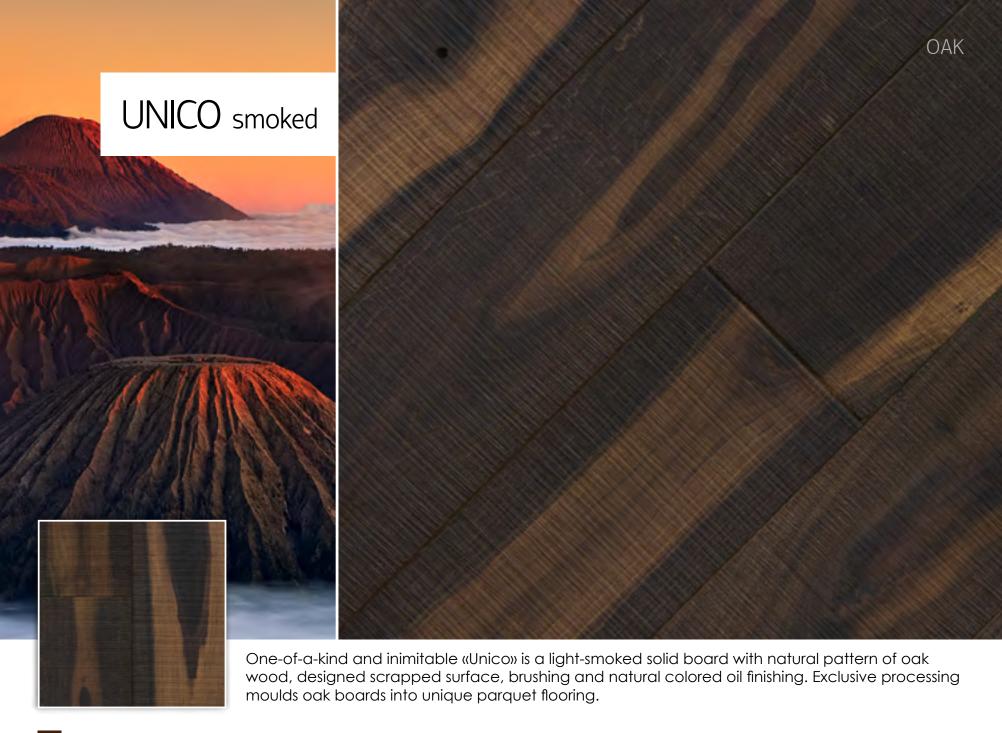



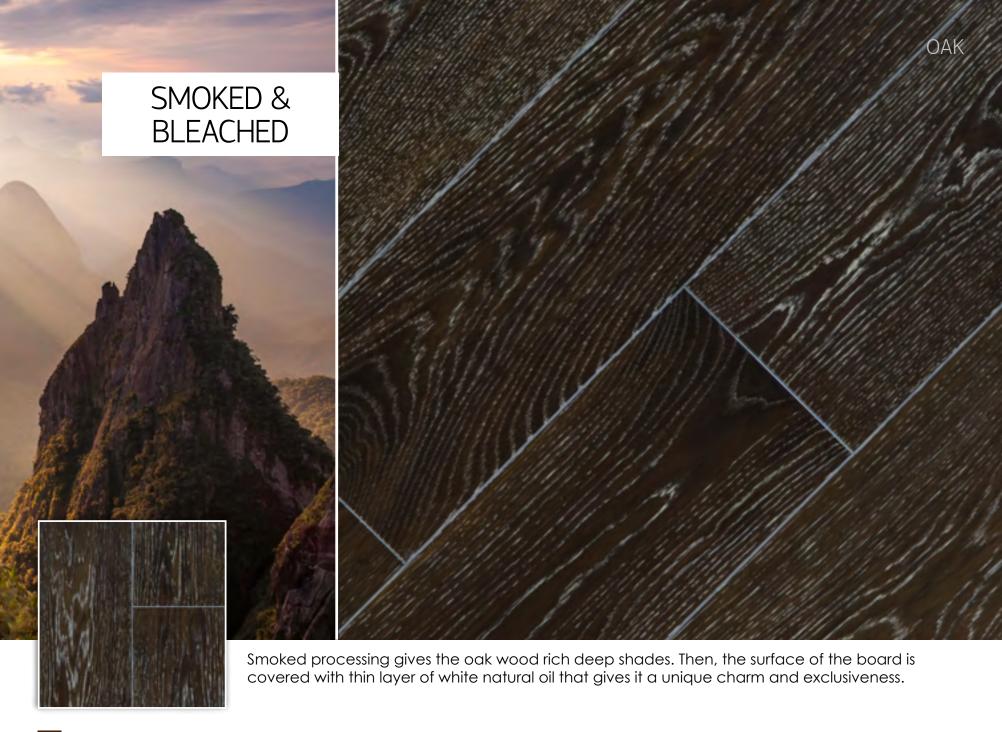

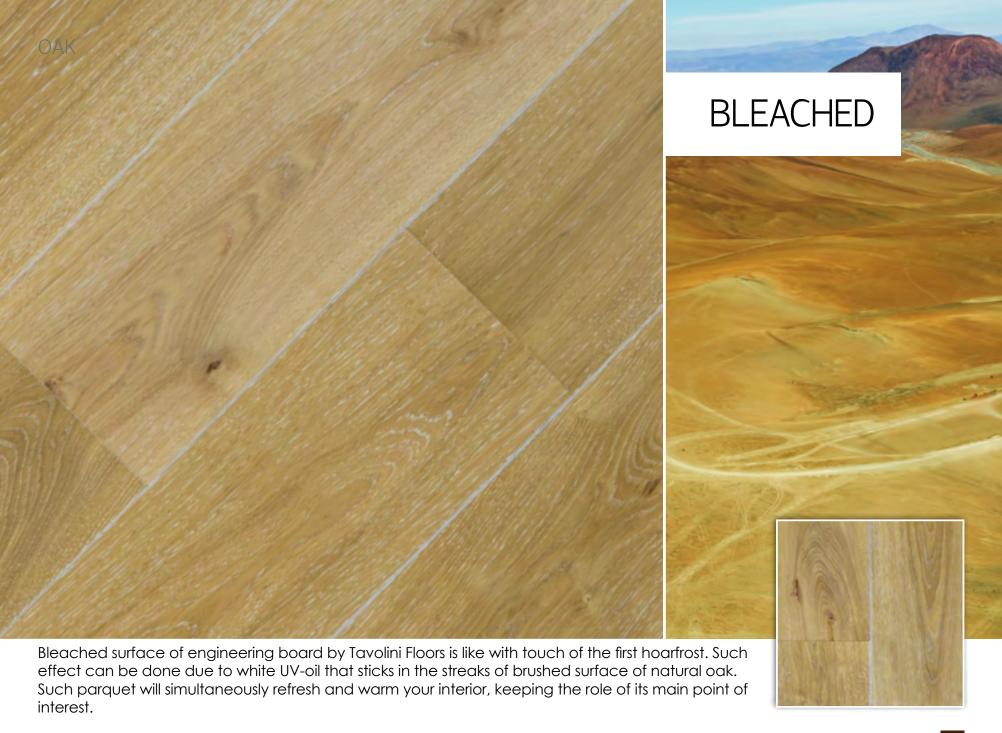

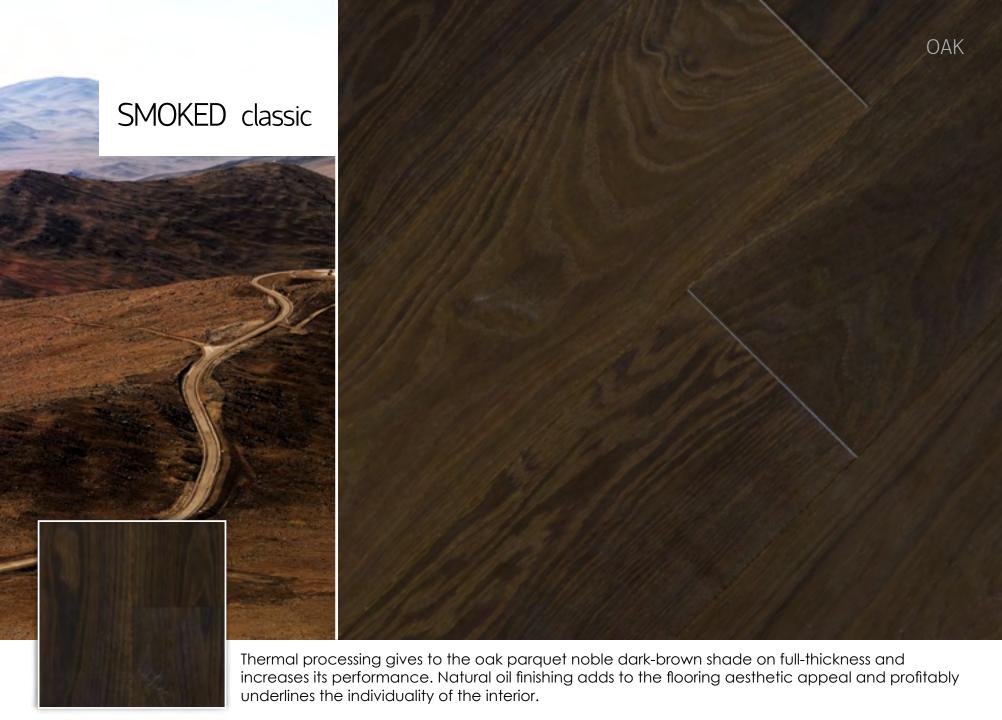







# IN THE COLOR


ofemotions

color palette of solid and engineering boards by Tavolini Floors is as diverse as spectrum of human emotions. From light happiness and sunny smile to hot passion and love, from light autumn melancholy with the touch of patina to all solemnity of dark shades. Our life is a caravan of emotions each of which you can test in our catalogue.


FEEL FREE AND MAKE A CHOICE!

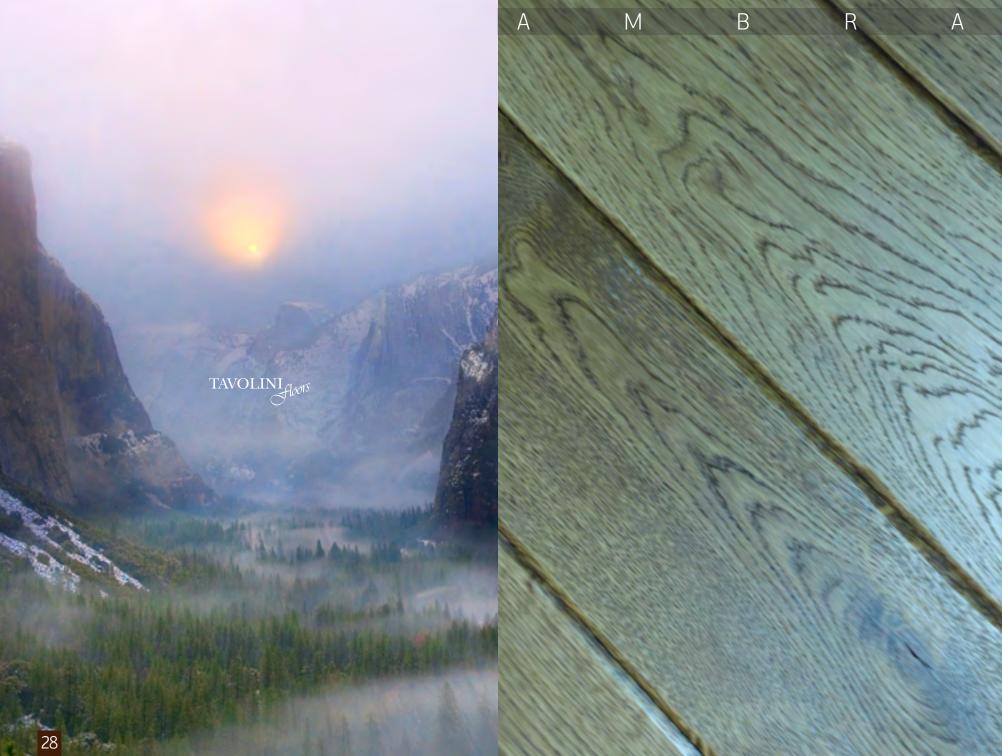

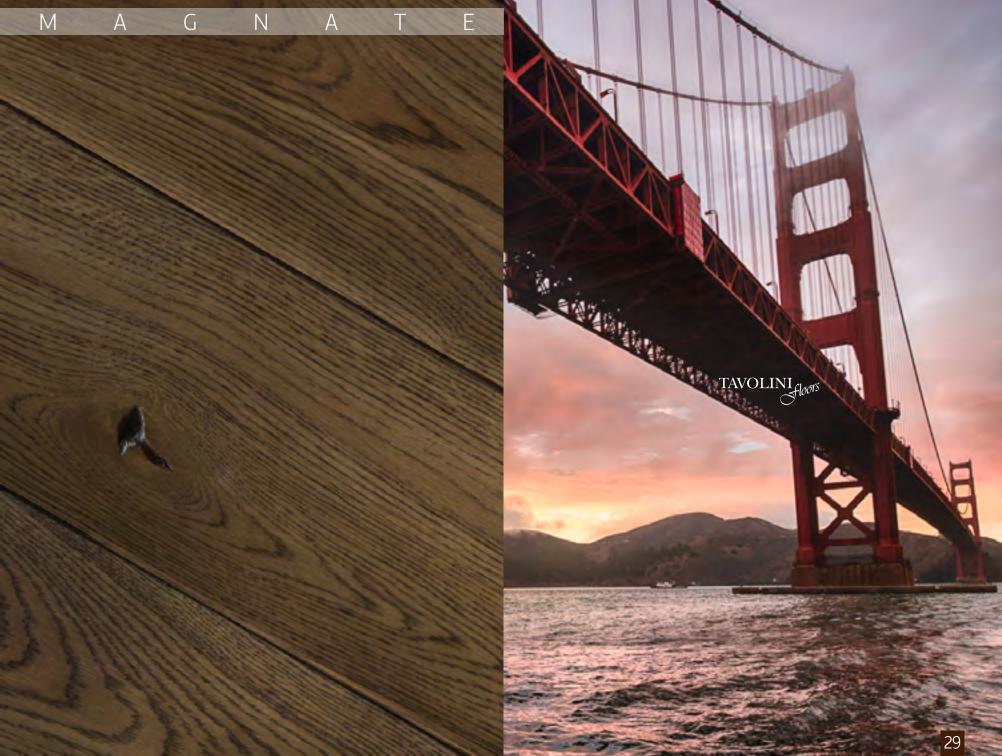

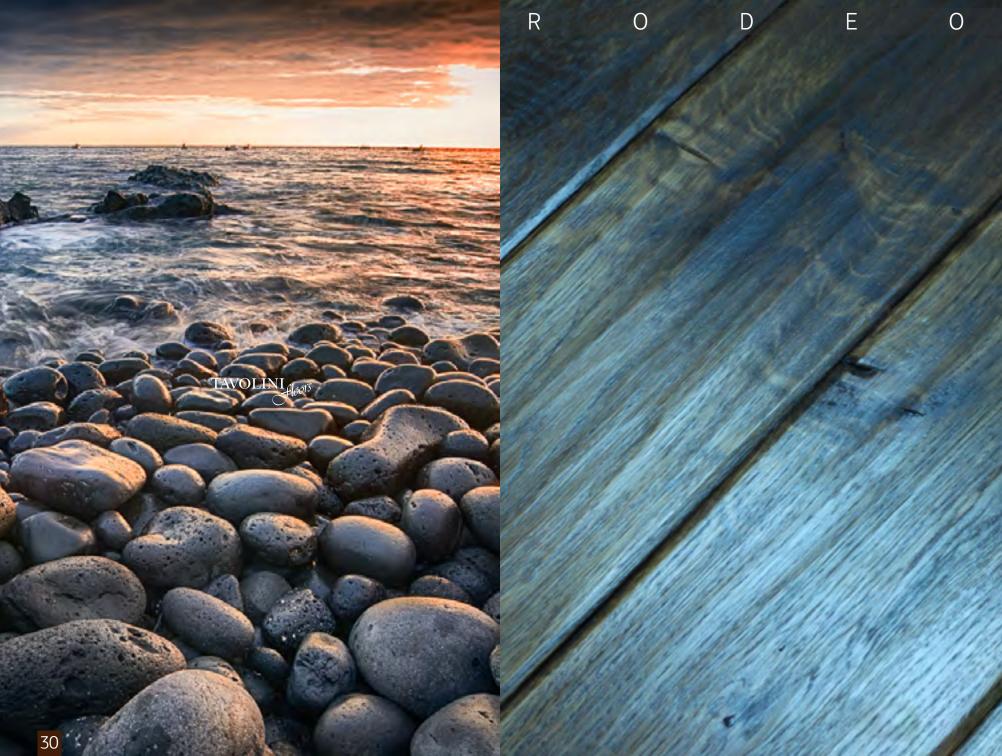



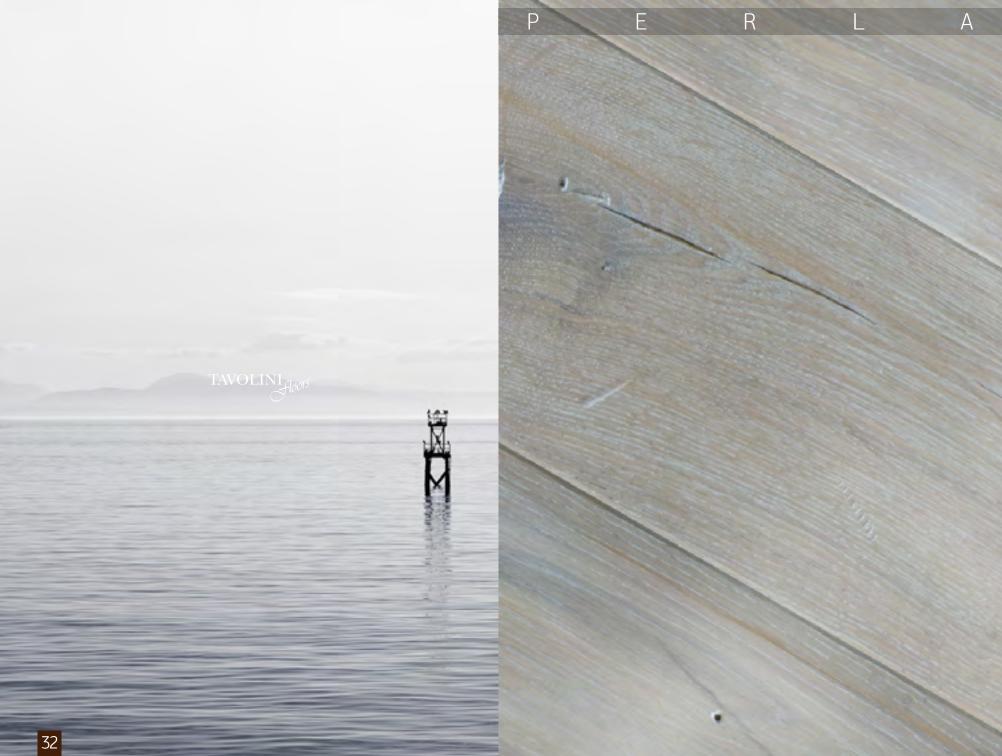







### Grades of wood





#### Classic grade:

The surface without cracks and sapwood, standard knots up to 10 mm and pin knots up to 3 mm are allowed. Wood surface of natural color with wood grain.

#### Rustic grade:

Cracks, sapwood, heartwood are allowed. Knots without restriction. Wood surface of natural color with wood grain, filling with dark-brown filler.











## HARDWOOD FLOORBOARDS



# Advantages of hardwood floorboards in "Exclusive" Collection

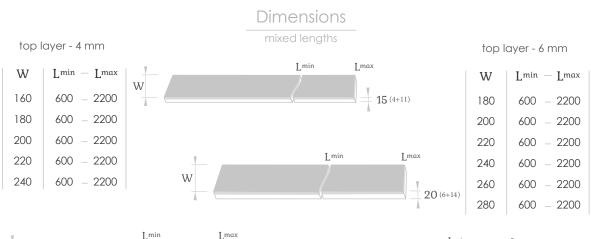

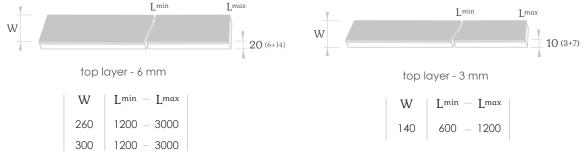

# Dimensions

fixed Lengths, engineered

top layer - 4 mm

Н	W	L
15 (4+11)	90	500
15 (4+11)	120	600
15 (4+11)	140	700



### top layer - 6 mm

Н	W	L
20 (6+14)	90	500
20 (6+14)	120	600
20 (6+14)	140	700

# Finishing

UV-varnish Natural Oil UV-oil

# Bevels

4-sides, machine 4-sides, manual No bevels

# Grades of wood

Rustic Classic



# Surface

Smooth

Brushed (deep and light prcessing)


Planed (manual processing)

Edge sawing

Open knots

Sawn & Brushed

Sawn (machine processing)

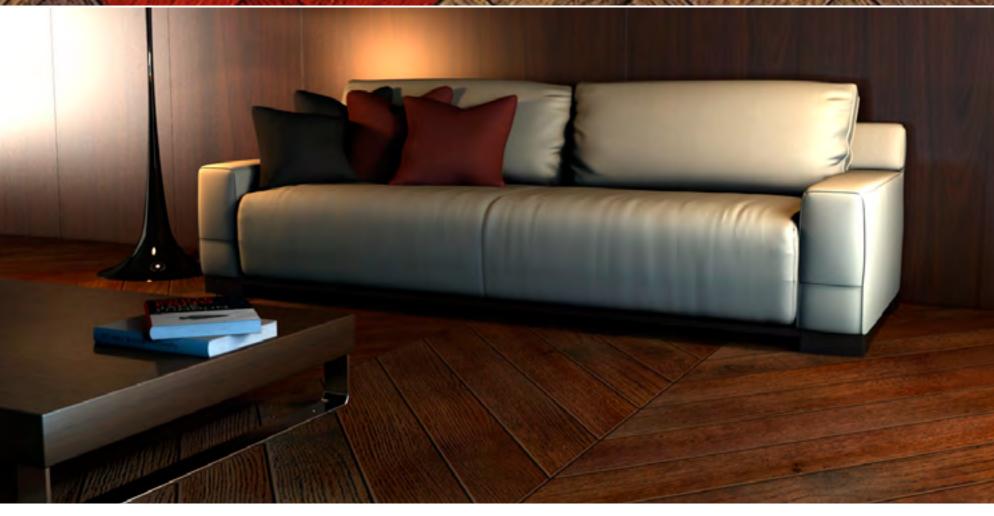



# CHEVRON PARQUET







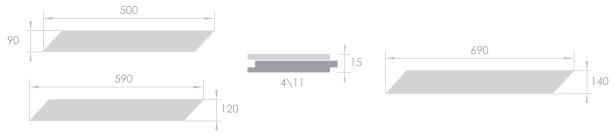

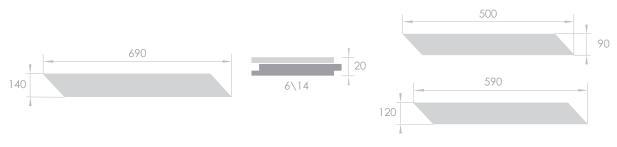

Custom sizes & cutting angles 30°, 60° – by request. Solid floorboards – by request.



39



# Products characteristic of «EXCLUSIVE» collection by Tavolini Floors

- 2 grades of wood without distinction in color and more «rustic» character.
- The length of boards from 400 to 3000 mm, width from 90 to 300 mm, thickness from 10 to 20 mm.
- About 50 different colors, smoked, limed-colored processing. «Smoked» processing changes the color of wood through the whole thickness and improve operating abilities of the boards.



- Handcrafted stylized design of surface (deep and moderate scrapping (for you to choose) brushing, open knots, handcrafted bevel).
- Machine sawn processing (horizontal brushing) surface).
- The UV-varnish, UV-oil, natural oil types of finishing, open air-dryied boards.
- Operational stability and exclusive design.



14 popular decors and colors.

Species: oak, ash (smoked – by request).

Bevels: 4-sides.

Surface: brushed, smooth.

Finishing: natural oil, unfinished.

Structure: Solid, Engineered, Triple-oak.

"Triple-oak"- it's the made of 3 oak layers floorboards (middle layer is cross-rotated).



# COLOUR



# Grades of wood:




natural colors, without sapwood, sporadically allowed intergrown sound knots up to 5-10 mm.



natural wood colors, without sapwood. Intergrown sound knots up to 5-25mm allowed. Dead or cracked knots up to 5mm are filled.



natural colors. Sapwood allowed at no more than 20 % of the width and at no more than 30% of pieces. Sound knots up to 50-80mm acceptable. Cracked knots are filled.




differences in color, cramps, healthy sapwood allowed at no more than 25~% of the width.












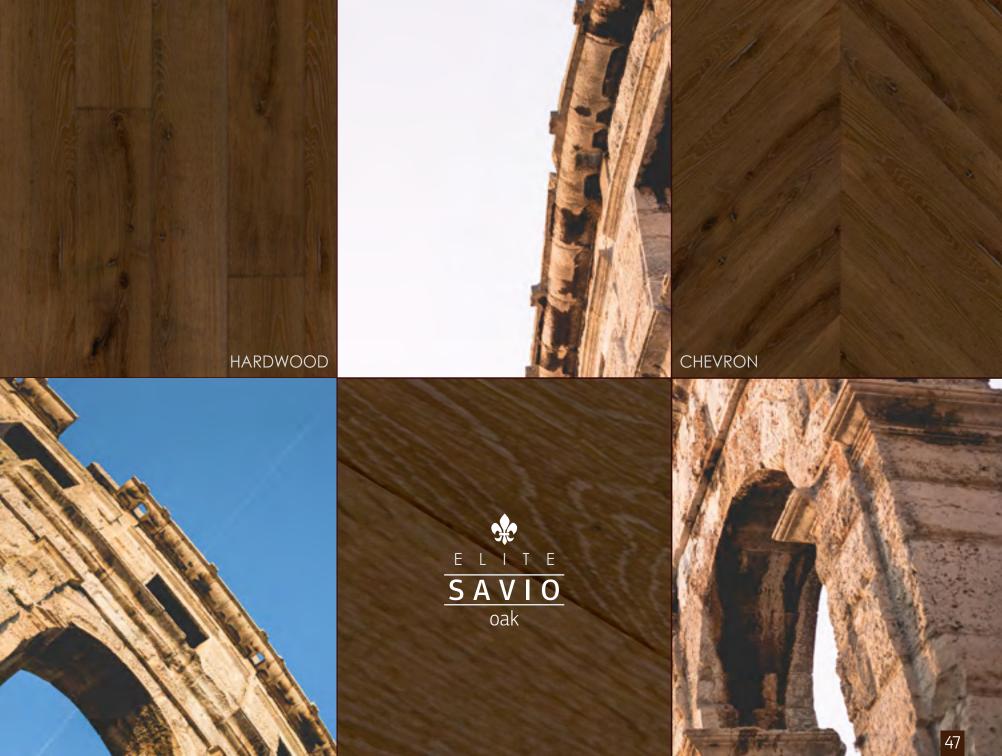

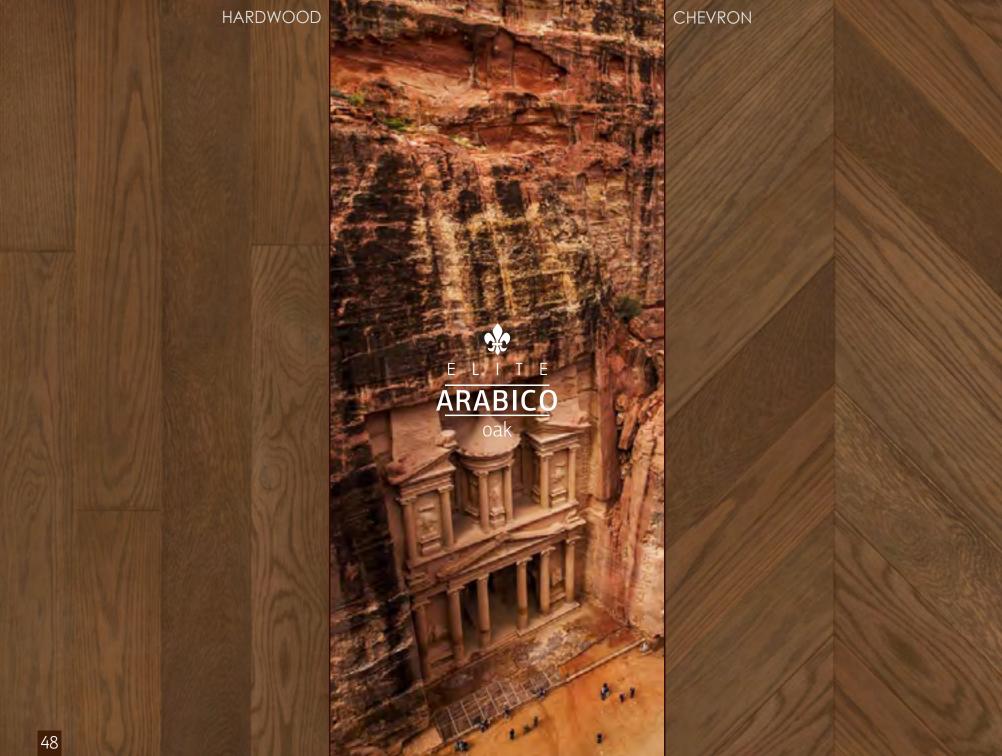


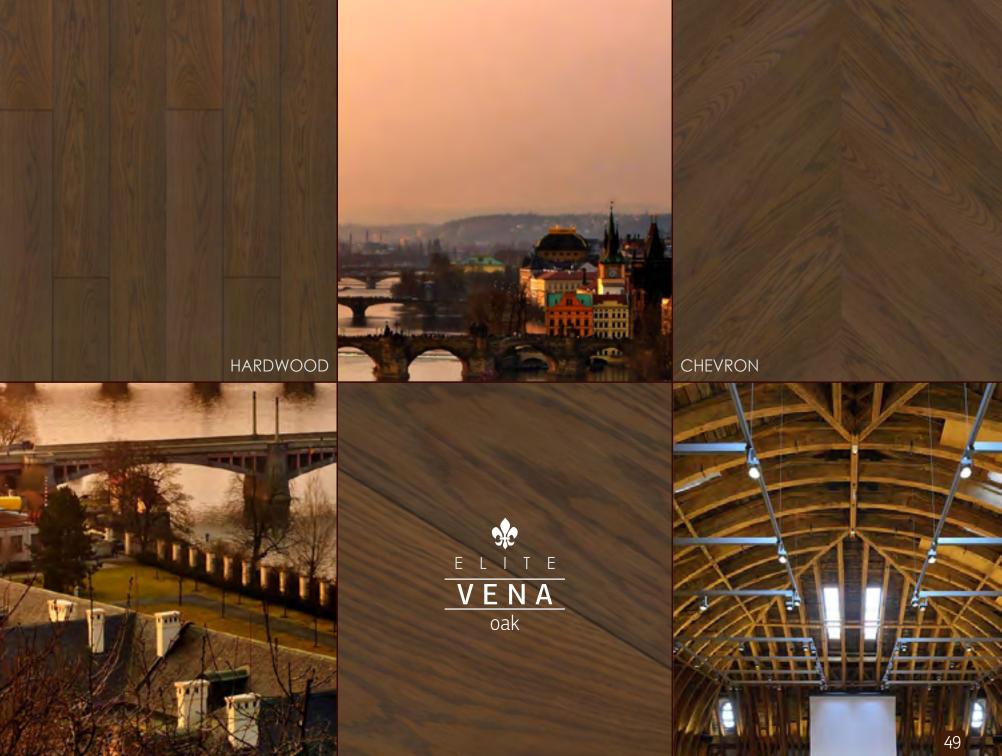



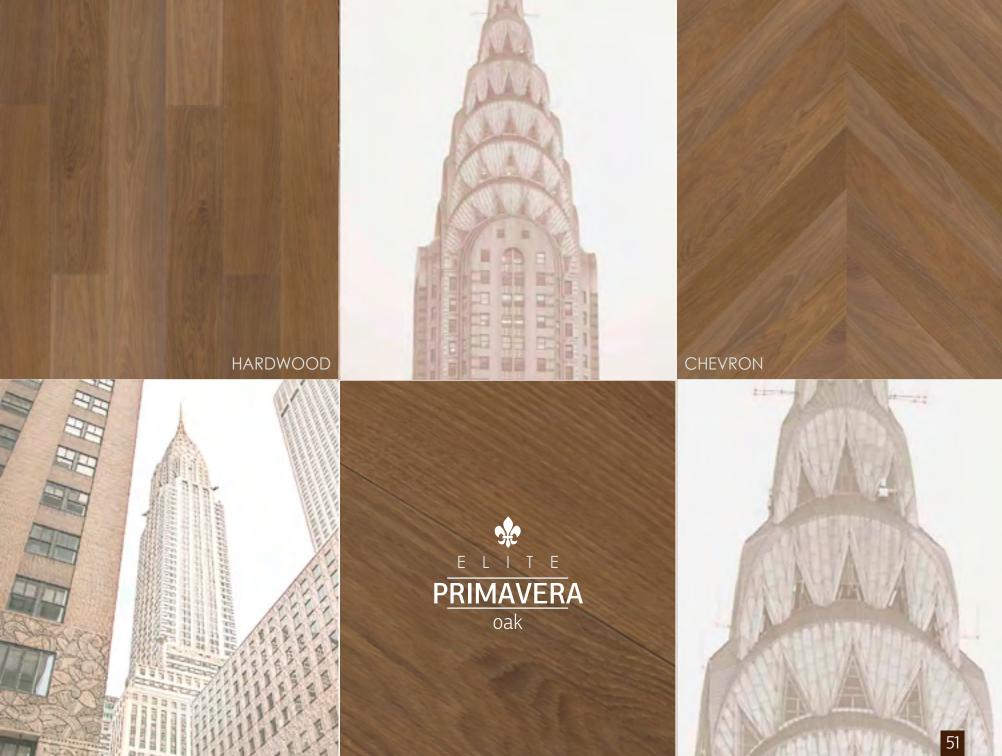



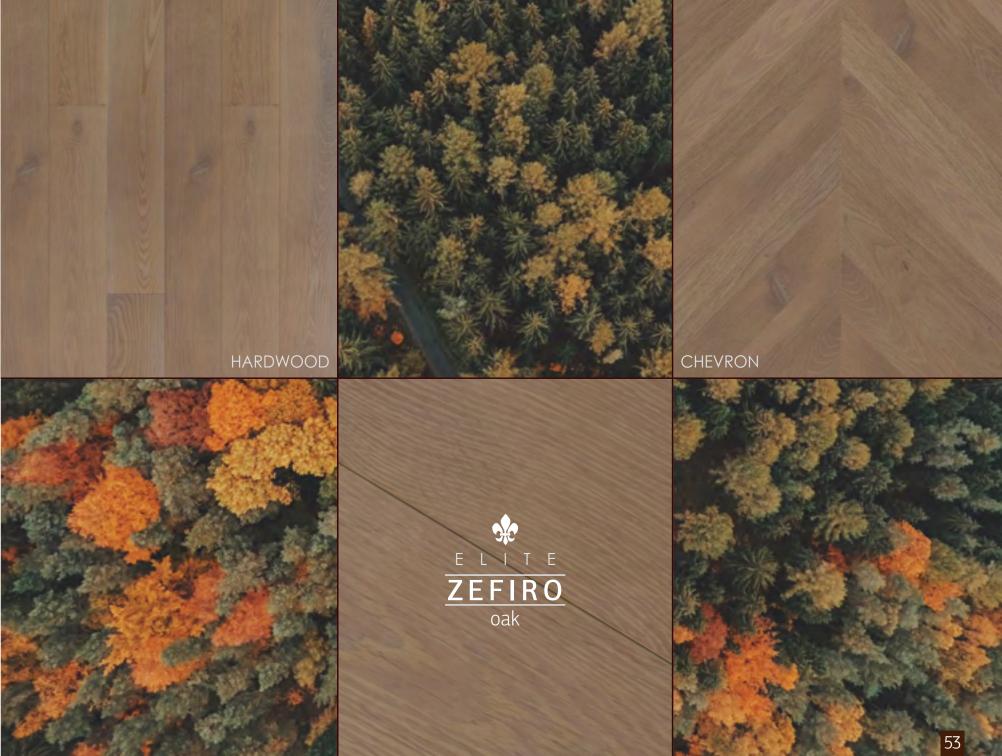










FLOORBOARDS

# **Dimensions**

# Solid boards




# Triple-oak

- it's the made of 3 oak layers floorboards (middle layer is cross-rotated). Thickness of layers (top layer first): 3 or 4mm + 7mm + 2,7mm



w





# Engineered boards

oak, top layer 3mm or 4mm







Finishing: natural oil or unfinished. 4-sides bevels.



# Chevron Dimensions 45° angle

# solid structure $\begin{array}{c} 90 \\ \hline 90 \\ \hline 90 \end{array}$ engineered structure

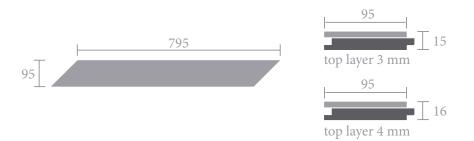

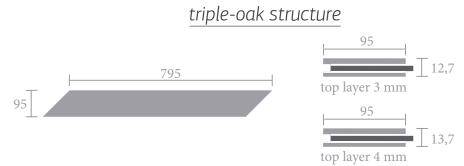

Dimensions, 60° angle - on request

CHEVRO





Solid floorboards & chevron parquet, more than 27 colors & decors.


Surface: brushed, smooth.


Species: oak, ash, thermo-oak, thermo-ash.


Bevels: 4-sides.


Finishing: UV-varnish, natural oil, unfinished.




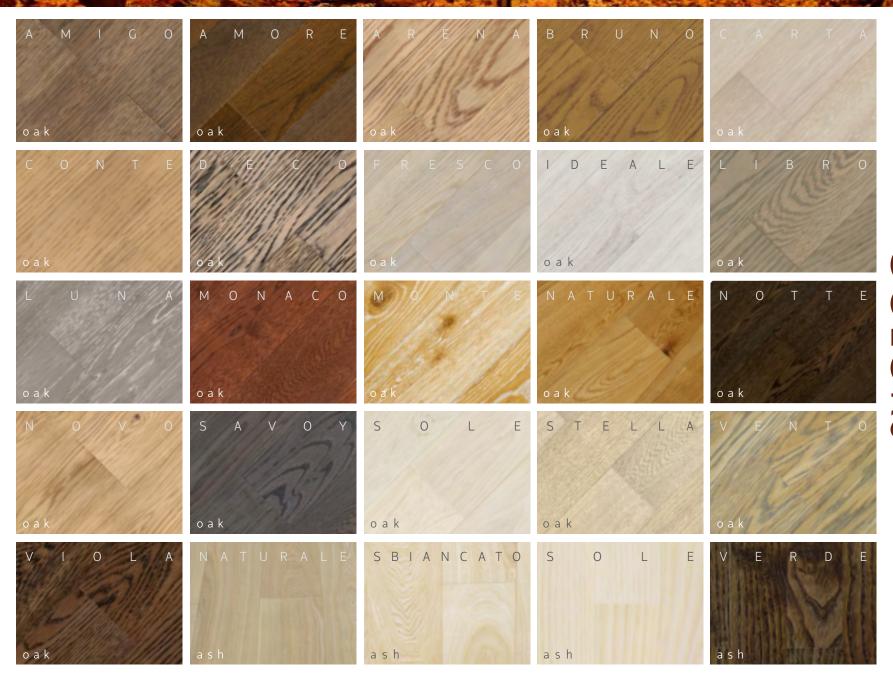


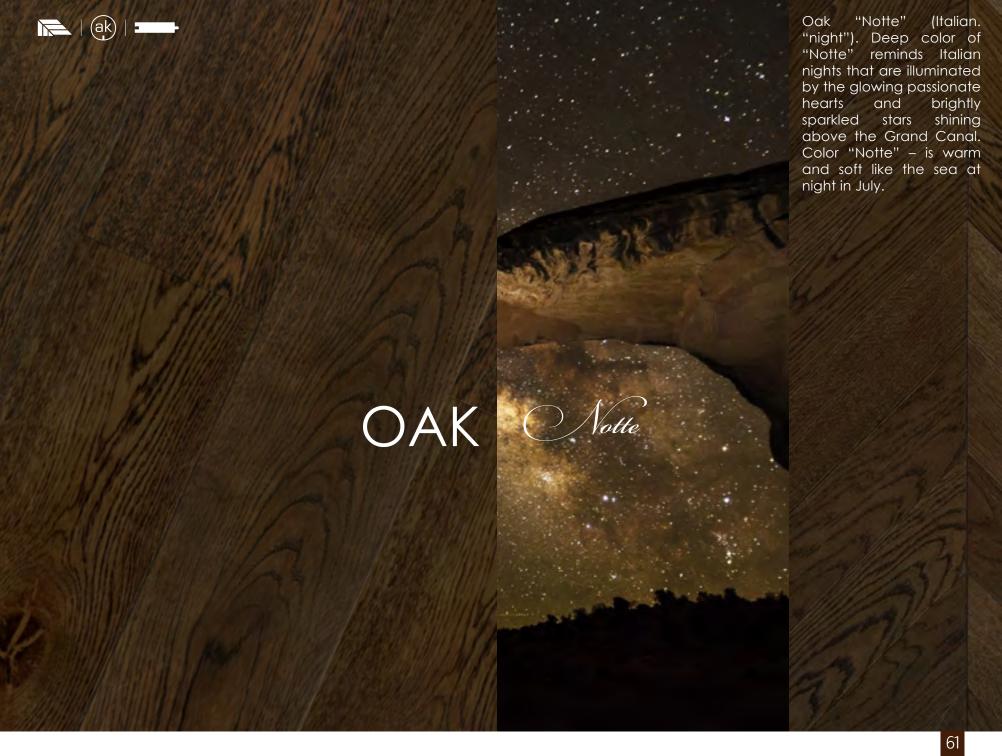

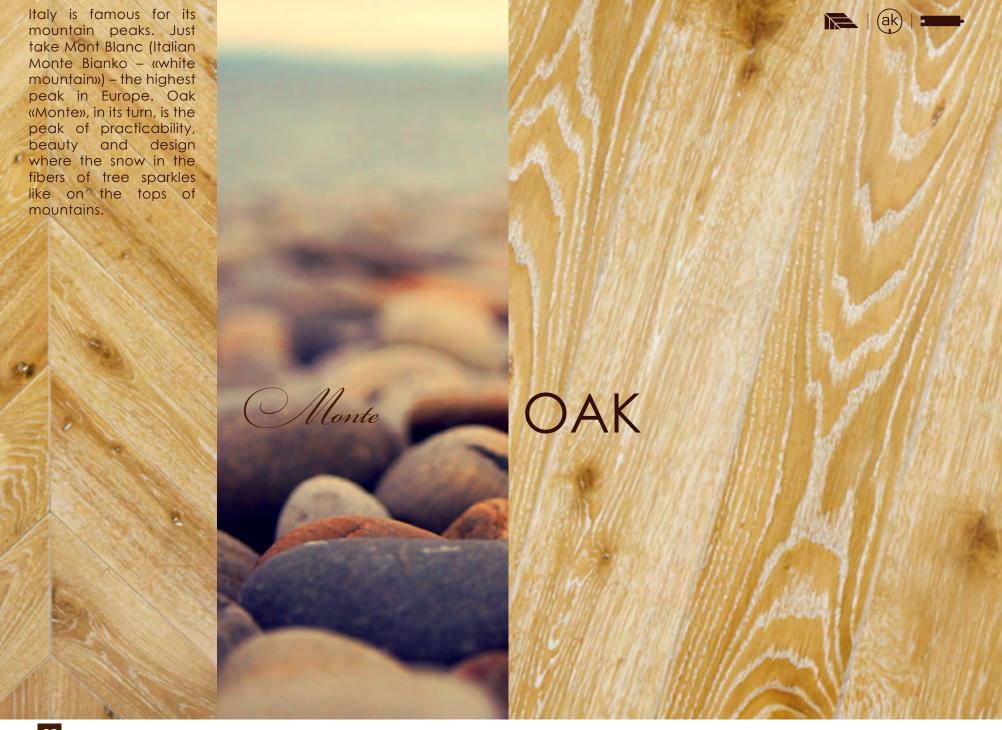

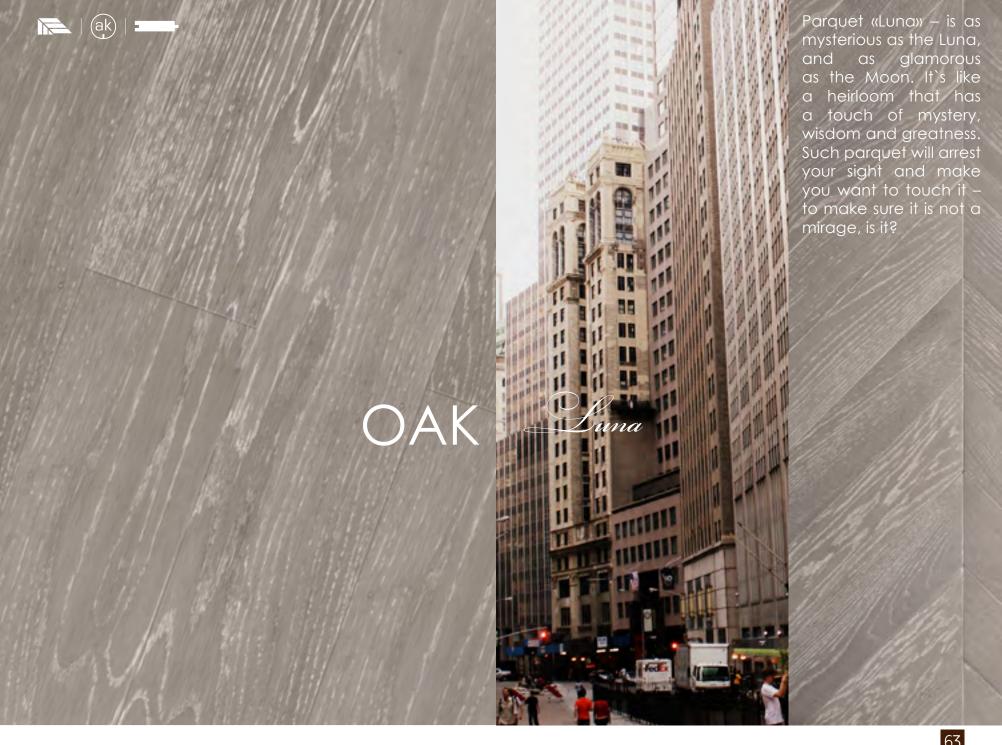

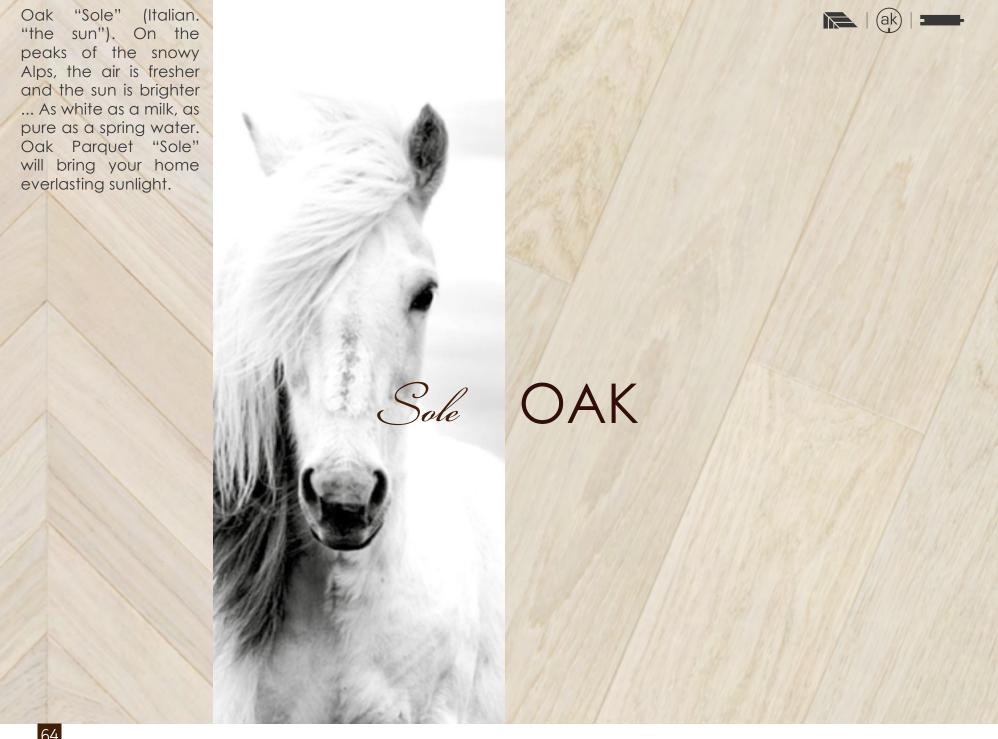

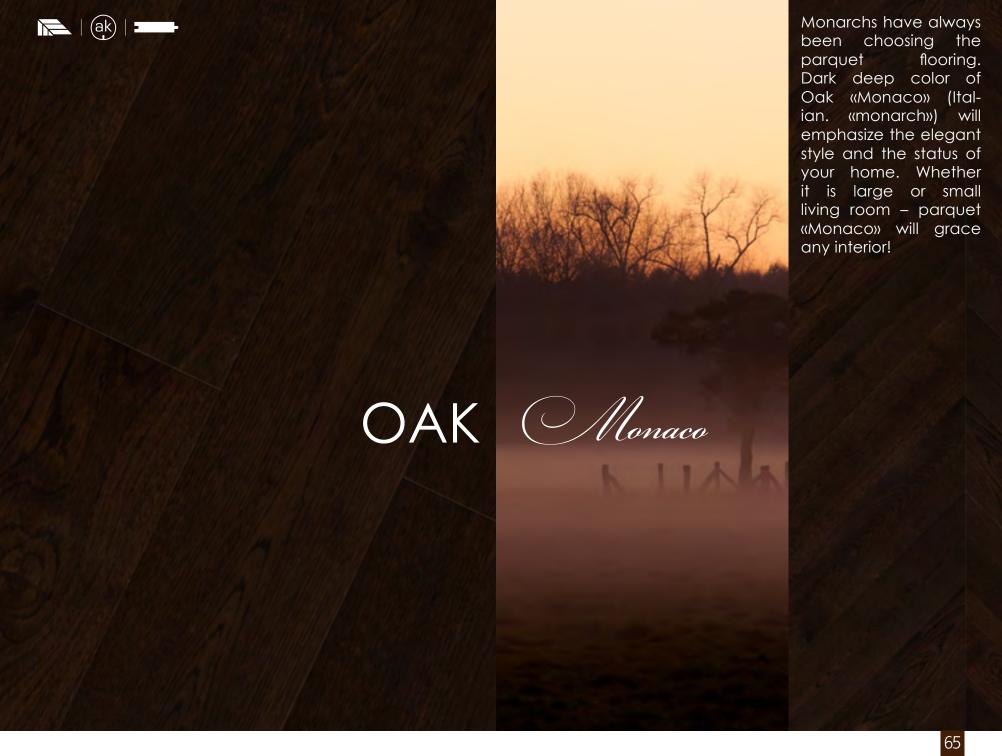


People say if you want to change something – start with a clean sheet. From Italian Carta means «paper». Oak «Carta» – is the same pure, white and real. Having laid this parquet at home, you can turn over a new leaf, even if a lot has passed.








| (ak) | =

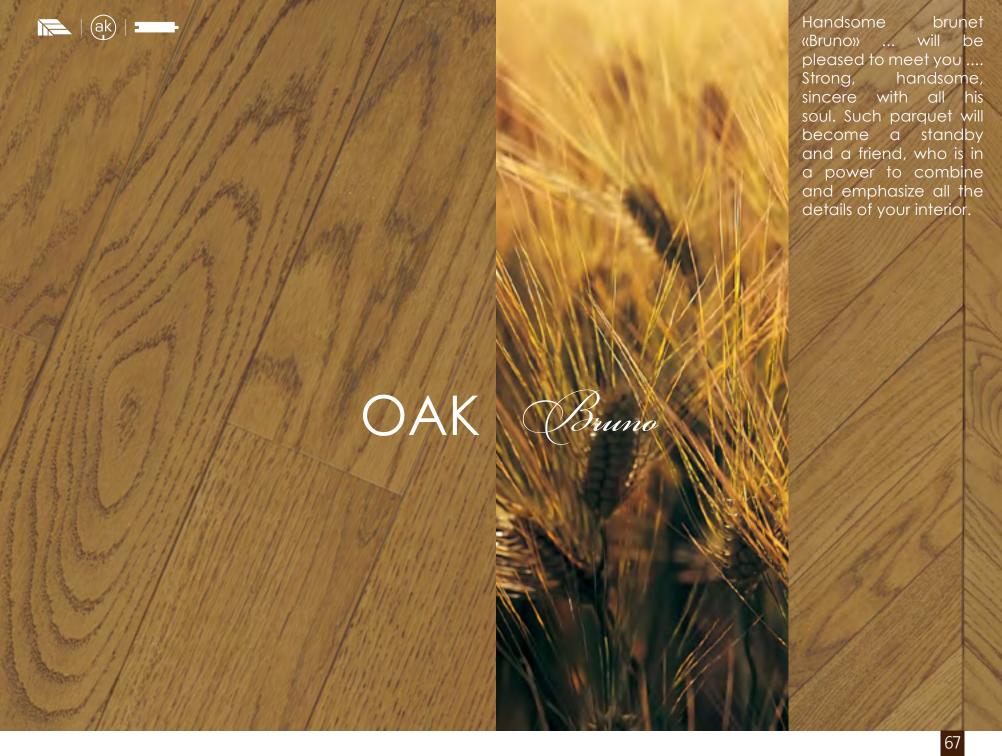



As tresh as a breeze, as cool as a morning dawn, – Oak «Fresco» will embreathe your home with the energy of youth and the new life. It will be pleasant to work and relax in such interior. In fact, everything is so simple, when your heart is full of coziness and light.

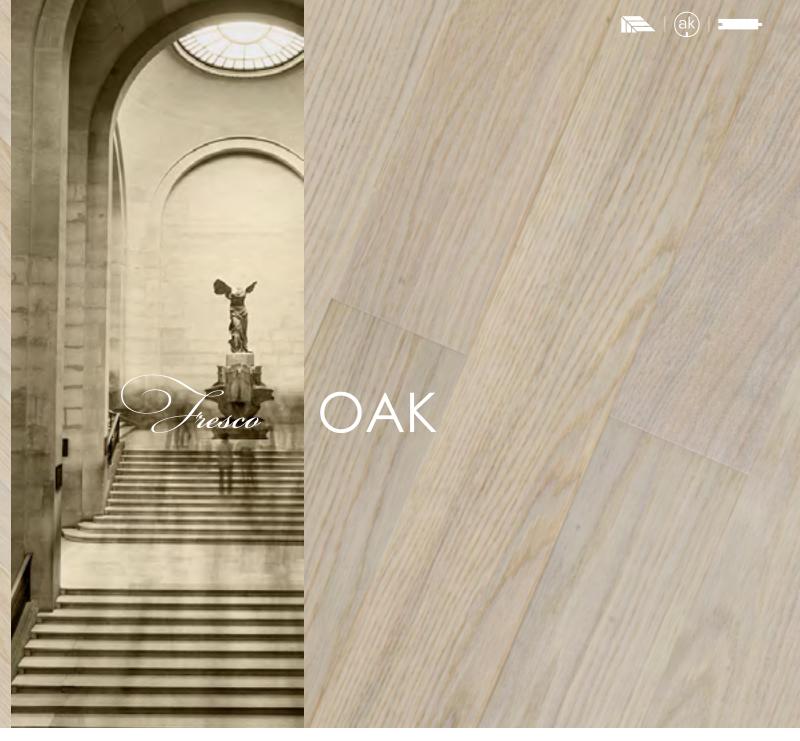


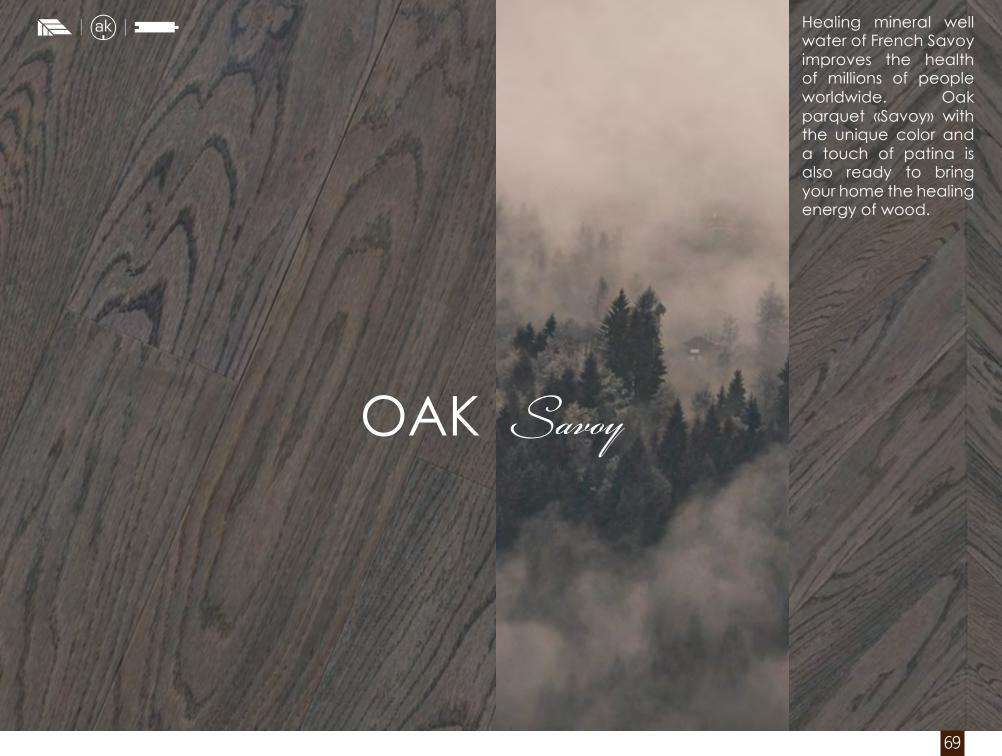


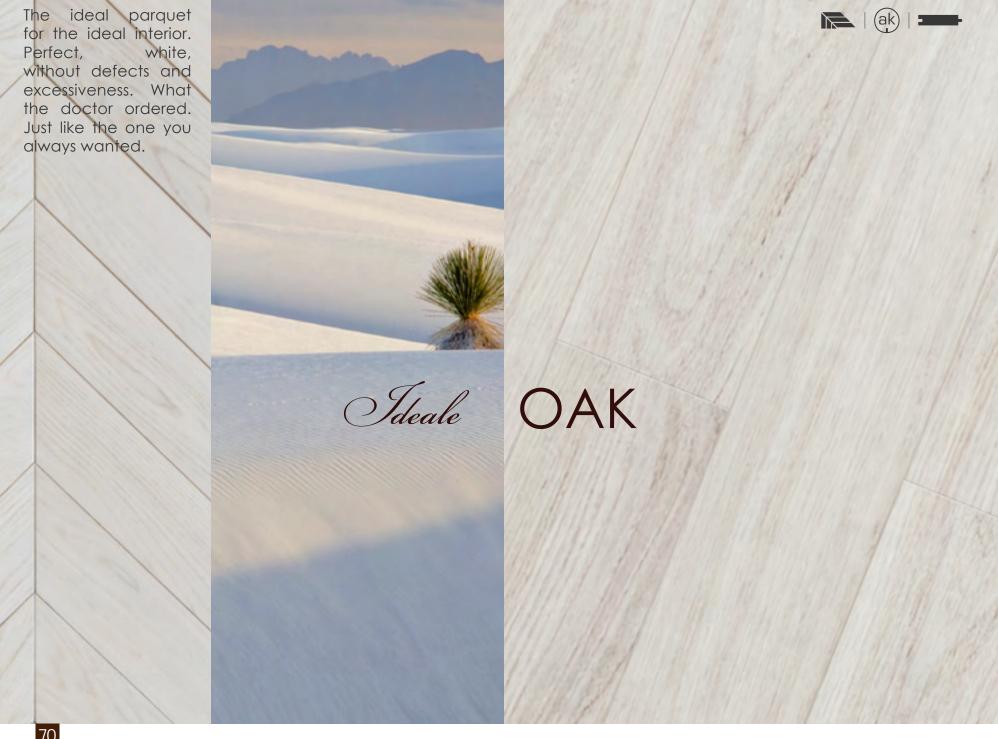


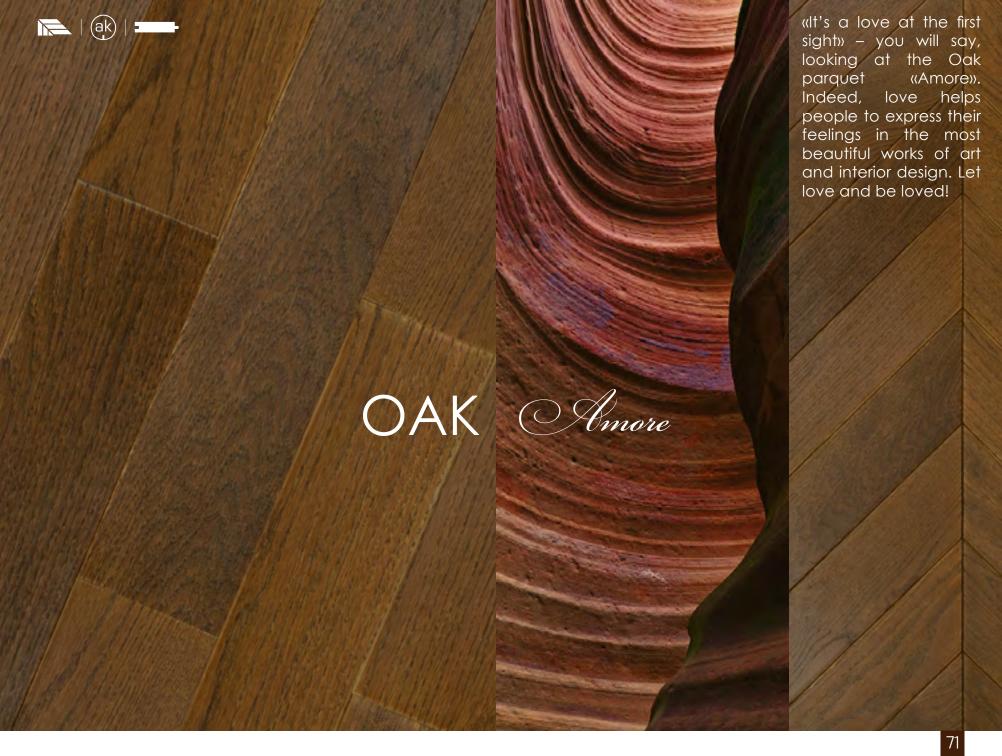


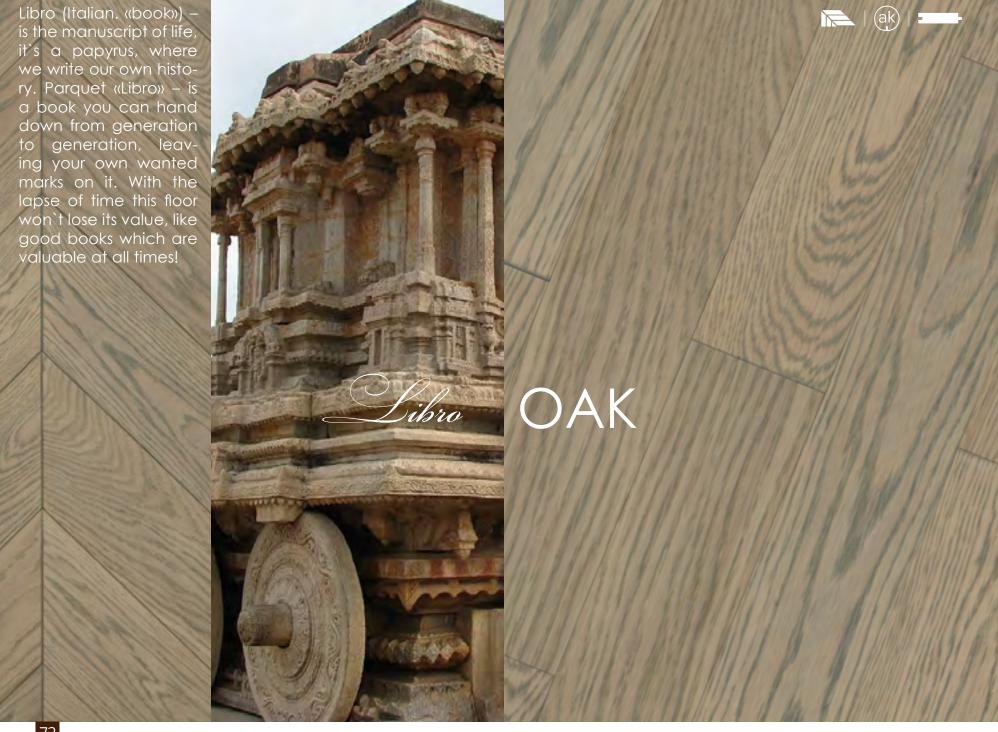


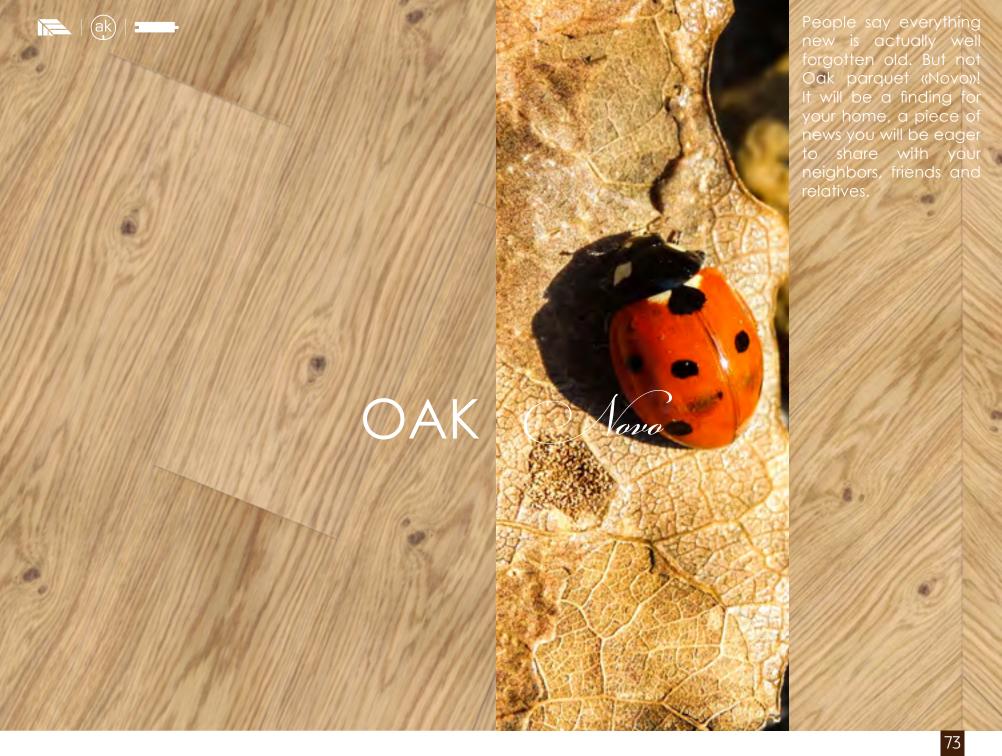

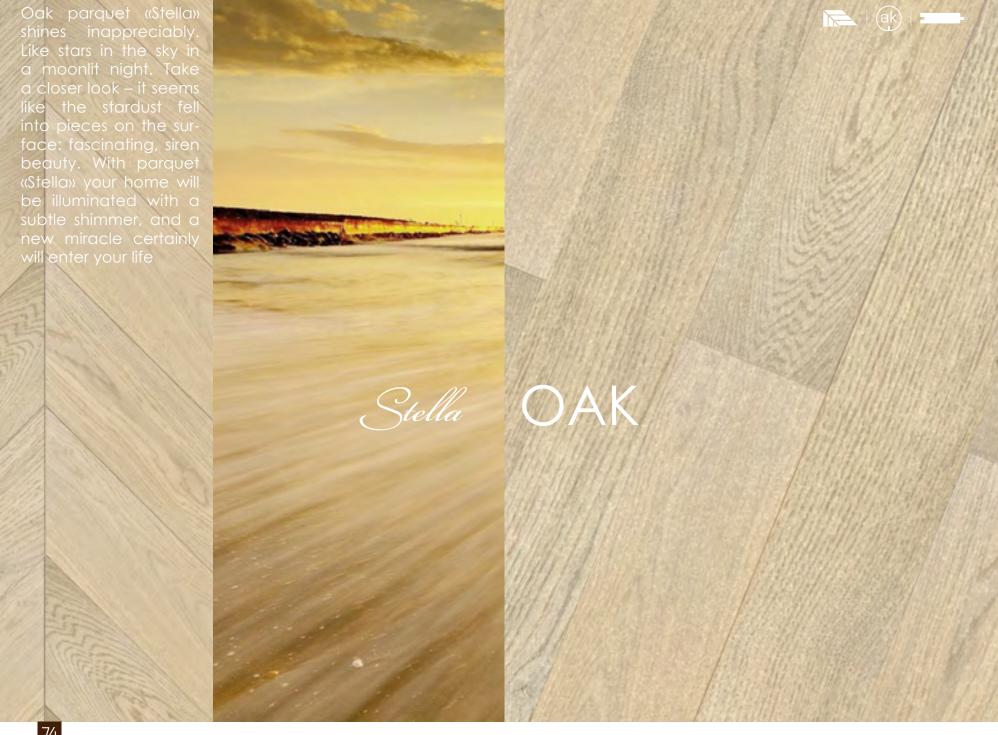


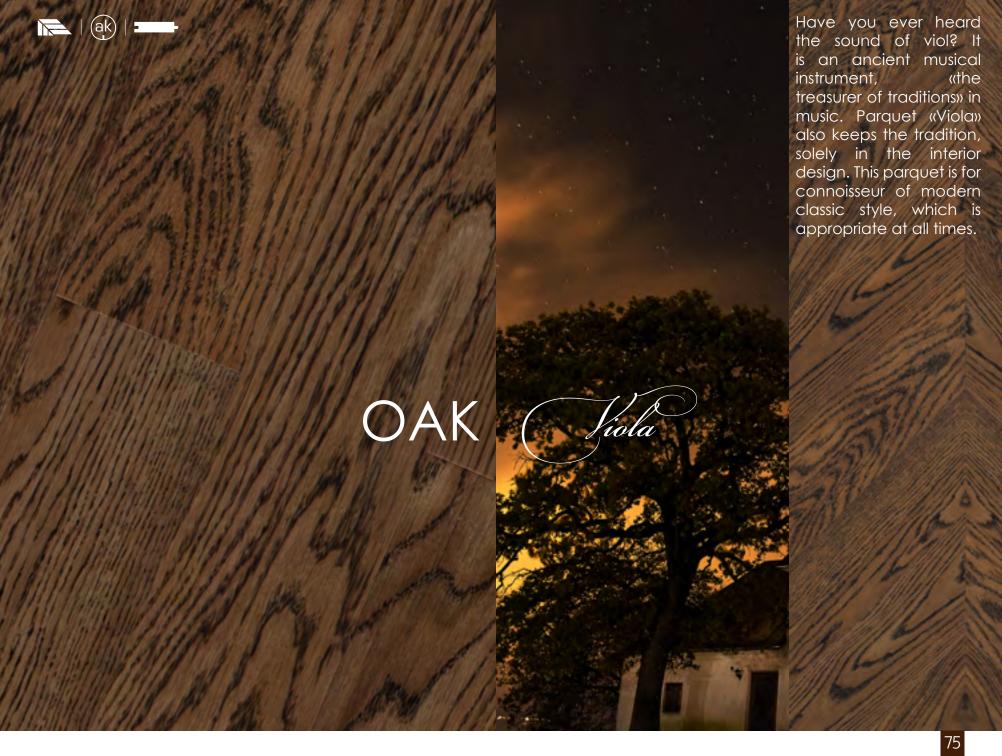

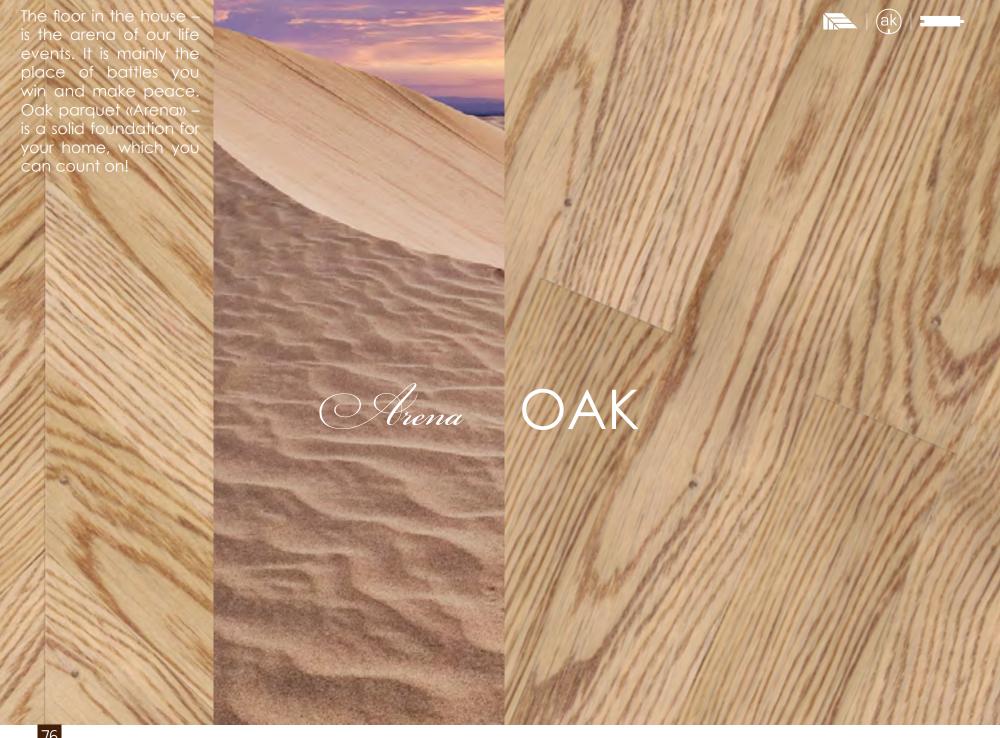


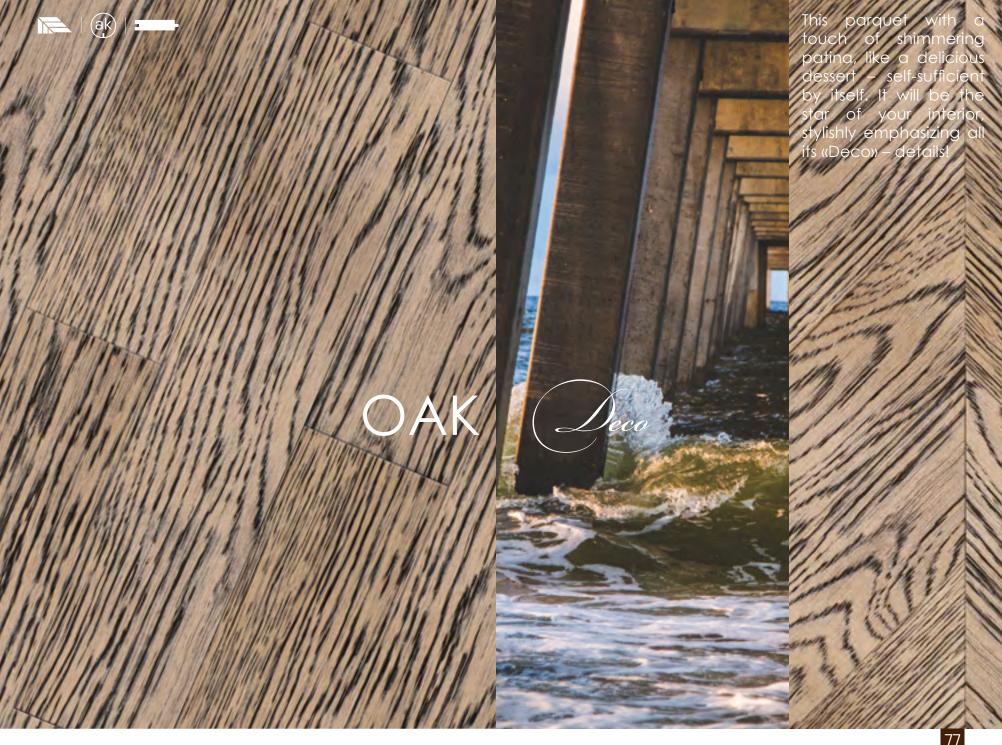



Like the wind playing with the sand on the seashore ...Oak «Vento» (Italian. «wind») – is as dynamic and warm as the evening breeze, and as playful and unpredictable as the wind from the sea. It is simultaneously refreshing and warm. Having this floor, you will always feel comfortable.

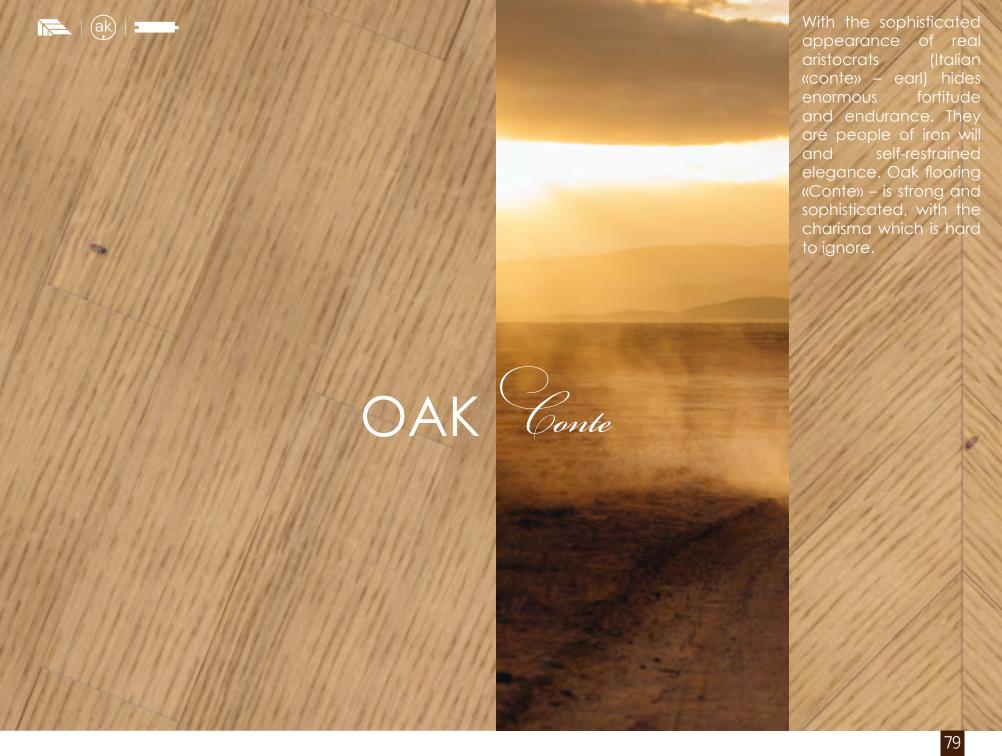



| (ak) | = A sincere friend (Italian. «Amigo») is ready to be a standby not only on weekdays but also on holidays. We love our friends as they are. Oak parquet «Amigo» – is also always close to you and never let you down!

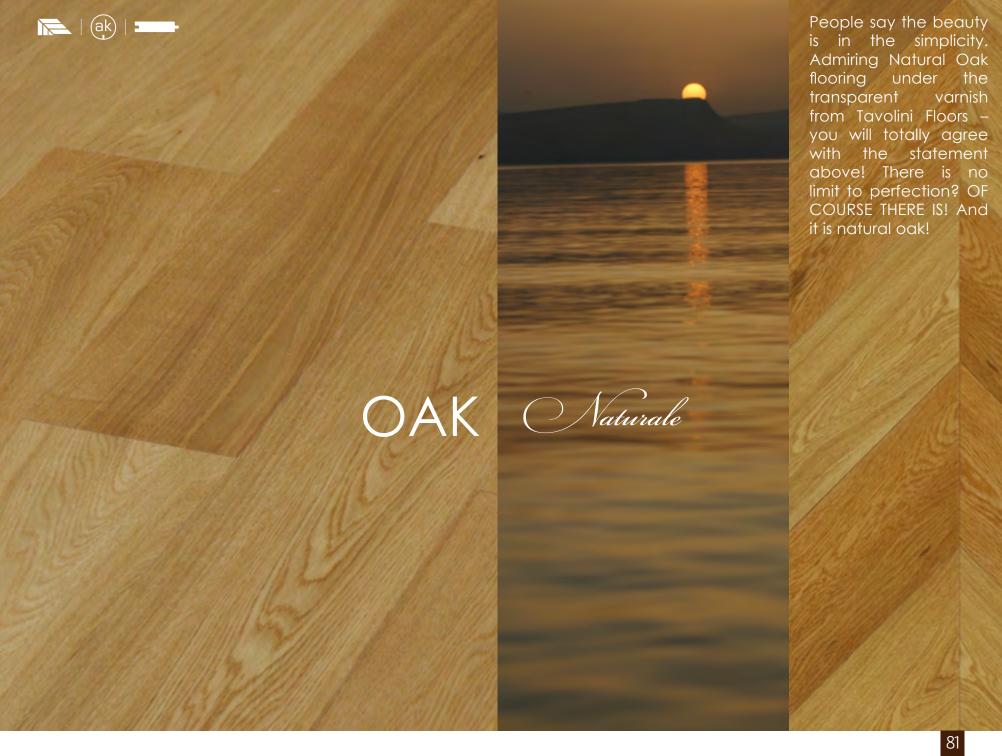

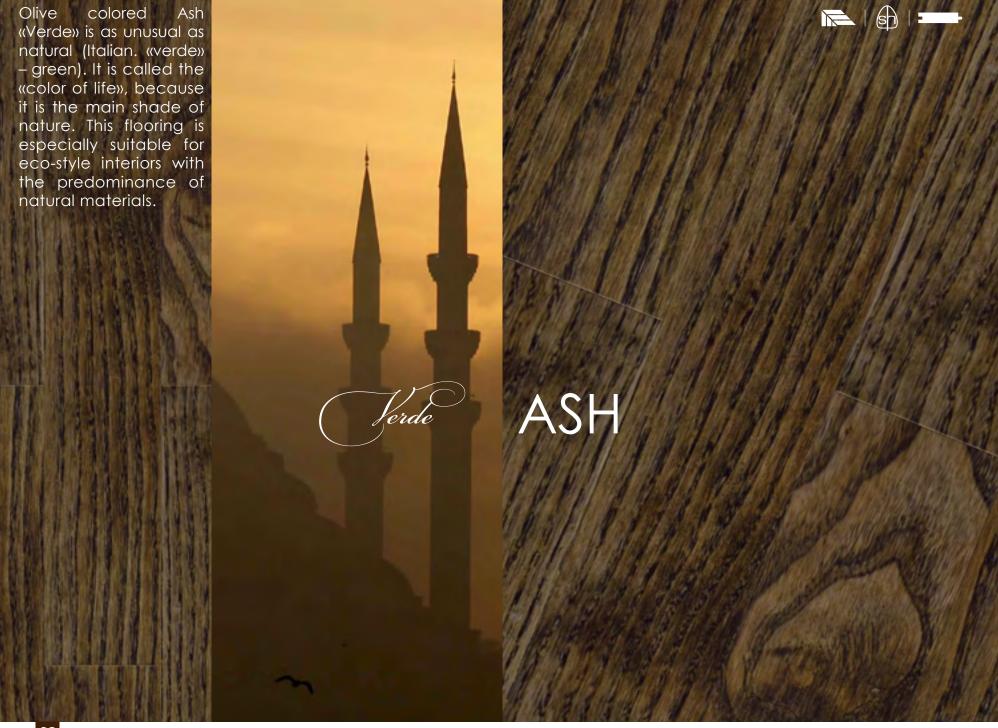

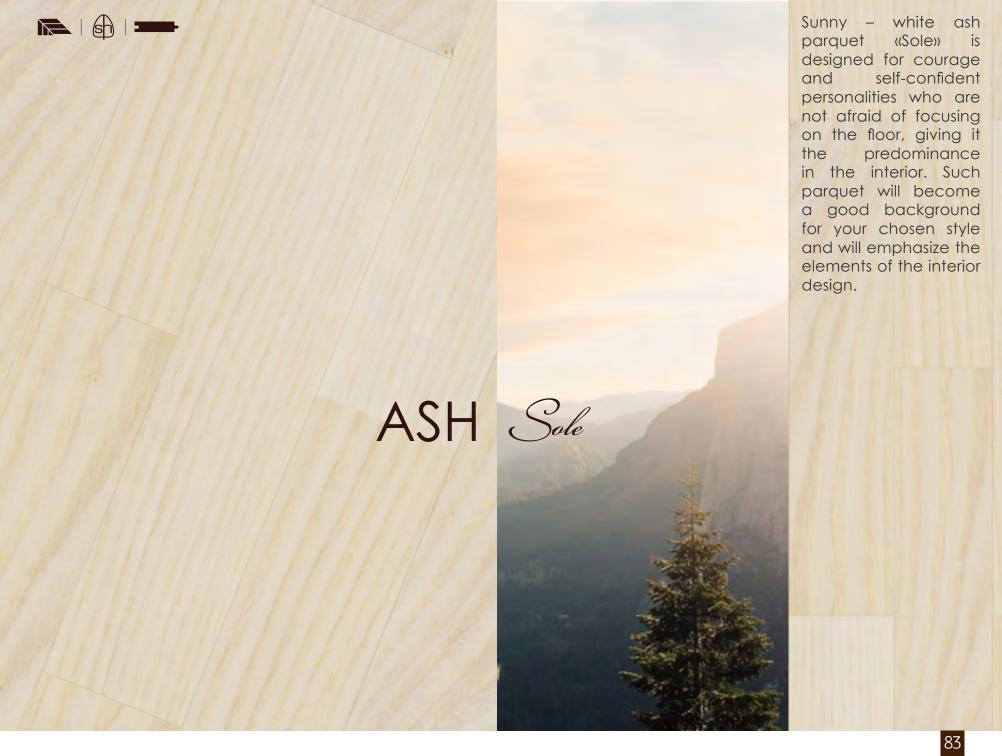

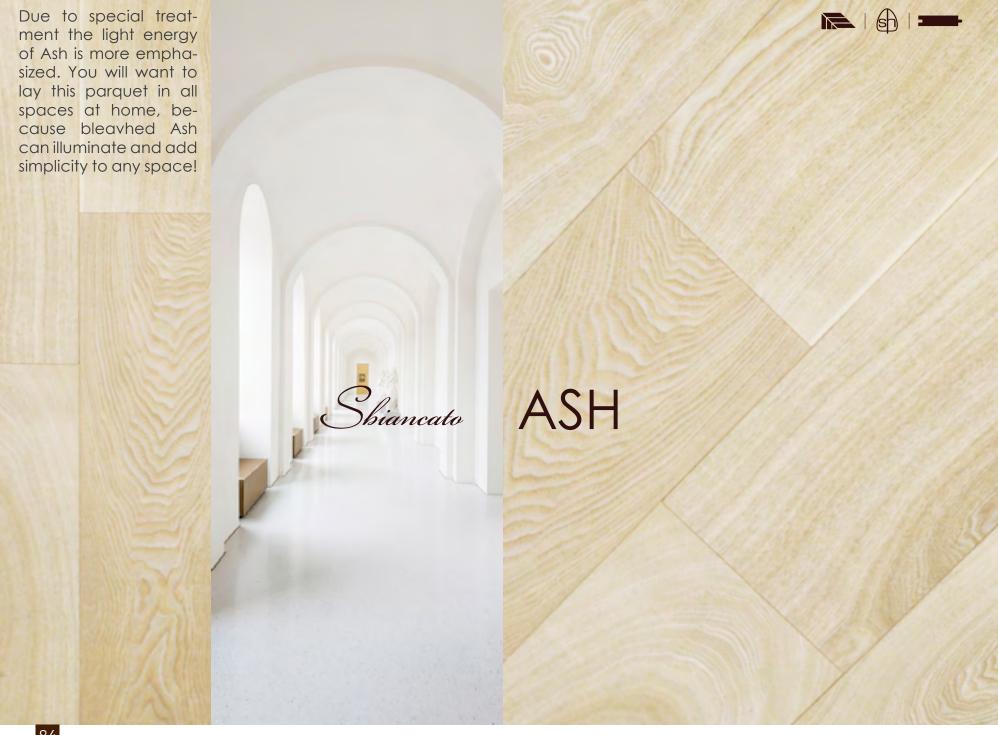

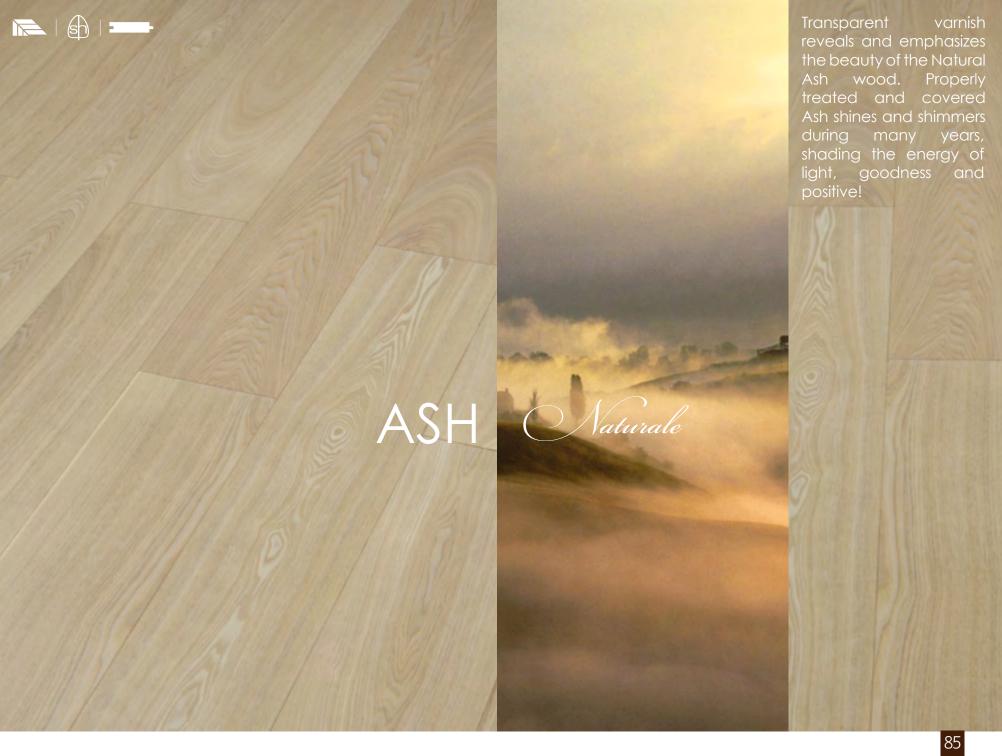






# **EXQUISITE SENSATIONS**

a touchable comfort

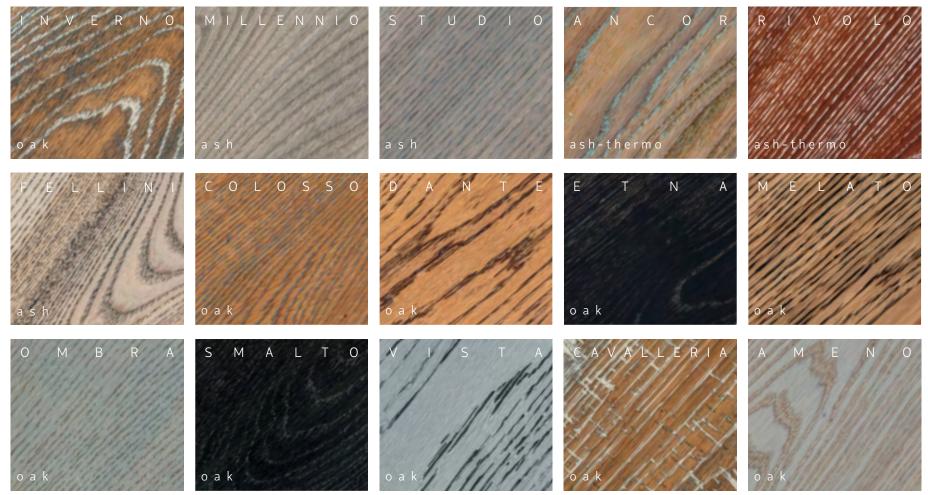

# Grades of wood

#### Extra


wood of a relatively unitary natural color, various grain. Acceptable sound and intergrown knots – up to 6 mm. Permitted sound sapwood on the left side, does not go through the using layer. Checks and shakes are not permitted. Medullary ray or glance, are acceptable.

# Medium

wood of a natural color, various grain. Sound and intergrown knots – up to 10 mm, unsound knots up to 5 mm. Permitted sound sapwood on the left side going through the using layer without the face layer. Checks of a 1mm depth and shallow shakes are permitted. Medullary ray or glance are acceptable.

#### Provence

various color and grain wood. Permitted sound and intergrown knots and knots aggregation to 25 mm. Acceptable sound sapwood and medullary ray on the right side, checks of a depth to 1mm. Only shallow shakes permitted.







# Grades of wood

ASH

# Crystal



laths of soft colors in shades of bright ash. Permitted sound knots up to 3 mm in diameter. Sound sapwood and checks do not occur.

# Decent



permitted sound knots up to 18 mm diameter and black knots to 20 mm diameter. Colors in the classification of sorts are excluded. Surface cracks with a depth of 1 mm. Cracks leading permissible shallow and not very visible.

#### Prime



laths of soft colors in shades of dark ash. Permitted sound knots up to 3 mm in diameter. Sound sapwood and checks do not permitted.

#### Extra



laths of different colors characteristic of ash wood. Permitted sound knots up to 5 mm in diameter at the level of grain. Sound sapwood does not occur. Acceptable shallow surface cracks (up to 0.5 mm deep) occasionally.



# Grades of wood


#### Decent

Wood of a various colour and grain Permitted sound and intergrown knots and knots aggregation to 10mm in diameter, checks of a depth to 1 mm. Shallow shakes permitted.



# **Imperial**

Tones colour schemes and slightly knotty wood graning free from knots.



## **Dimensions**

thermo ash

Н	W	Lmin Lmax		Lmin	Lmax	W
15\16	100	400 - 1400				V V
15\16	120	600 - 2000	₹			Н
15\16	1.50	600 - 2000				




# S O L I D W O D

Solid wood floors had been laid down long before the parquet blocks or other type of parquet was appeared. Due to the solidity of the board through the entire thickness (consists of one piece of wood), solid wood has always been considered as a scent of respectability and good taste. With proper care and maintenance the solid wood will serve from 50 to 200 years and like a family treasure, it can be handed down from generation to generation.

# SOLID FLOORBOARDS

# DIMENSIONS

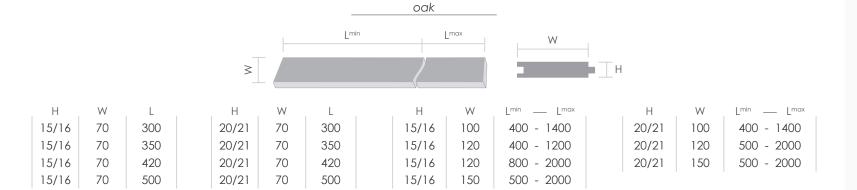

ash/thermo-ash			
Н	W	Lmin Lmax	
15/16	100	400 - 1400	
15/16	120	600 - 2000	
15/16	150	600 - 2000	

thermo-oak			
Н	W	L <sup>min</sup> — L <sup>max</sup>	
15/16	120	500 - 2000	

Finishing	Surface	Bevel	Species
UV-varnish Natural oil Unfinished	Brushed Smooth	4-sides	Oak Ash Thermo-oak Thermo-ash

Oak



Ash



Chevron parquet



Solid floorboards






#### C H E V R O N FLOORING


The "chevron" laying was originated many centuries ago in France. The first samples of such laying were appeared in the XVI century, while the first written records of it were found in the description of the Palace of Versailles. Today, "chevron" is again in the peak of popularity – its elegant sophistication has already conquered many countries.

"Chevron" – is an advanced type of the "Herringbone pattern". To produce such kind of parquet boards, the ends of the boards are cut in a special way. At the junction, they do not form a zigzag but a straight line. It is fashionable type of flooring, which will never lose its relevance.

# CHEVRON PARQUET DIMENSIONS

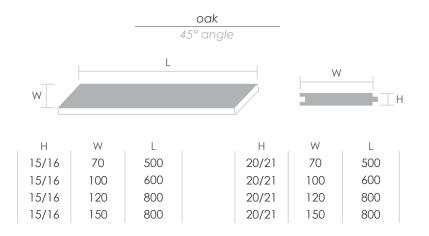





	45° angle			
, н	W	L		
15/16	100	600		
15/16	120	800		
15/16	150	800		

ash

thermo-oak					
45° angle					
, н	W	L			
15/16	120	800			

Oak



Ash



Chevron parquet

description



Solid floorboards



